

Course1 / Course 2

generalities, The OSI Model, Network devices
TCP/IP MODEL, The Networking Media, TCP/IP Math
Introduction to TCP/IP Addresses, Subnetting
Exercices VLSM, Summarization

What is Routing? What is a Routing Protocol? Distance Vector
- RIP

Annexes :


Routers & Cisco IOS
Router Configuration

Course 3 / Course 4

VD vs link state - OSPF
Switching, STP, Switch Configuration, Vlans
NAT : Network Address Translator

Internet services : exemples dhcp , dns, ftp, HTTP; mail

Icons and Symbols

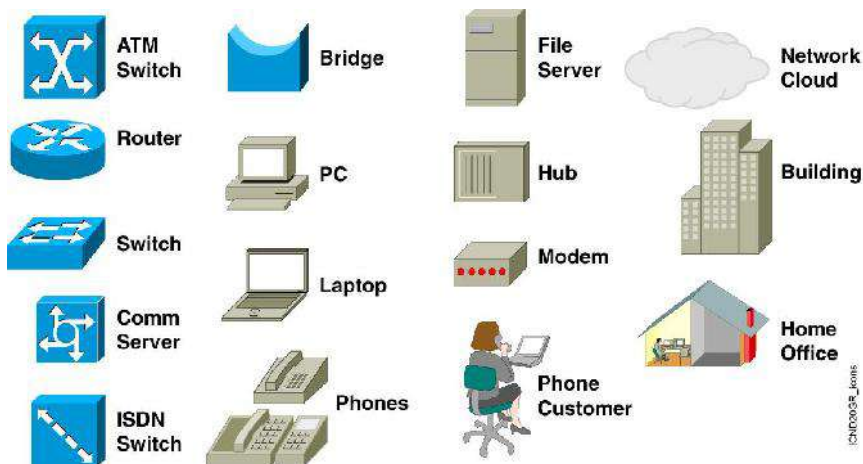

Businesses needed a solution that would successfully address the following three problems:

- How to avoid duplication of equipment and resources
- How to communicate efficiently
- How to set up and manage a network

Businesses realized that networking technology could increase productivity while saving money.

Equipment that connects directly to a network segment is referred to as a device.

These devices are broken up into two classifications.

- ☐ End-user devices
- ☐ Network devices

End-user devices include computers, printers, scanners, and other devices that provide services directly to the user.

Network devices include all the devices that connect the end-user devices together to allow them to communicate.


Network Interface Card

A network interface card (NIC) is a printed circuit board that provides network communication capabilities to and from a personal computer. Also called a LAN adapter.




Hub

Connects a group of Hosts

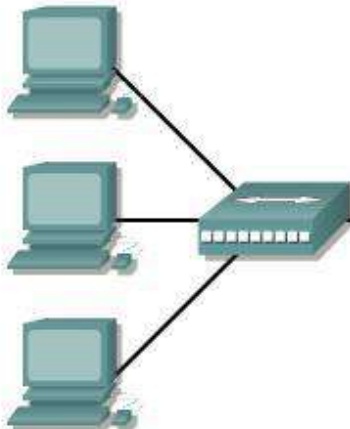


Switch

Switches add more intelligence to data transfer management.

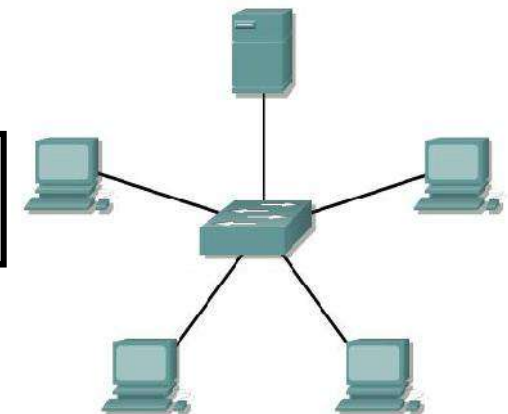

- ☐ Routers are used to connect networks together
- ☐ Route packets of data from one network to another
- ☐ Cisco became the de facto standard of routers because of their high-quality router products
- ☐ Routers, by default, break up a *broadcast domain*

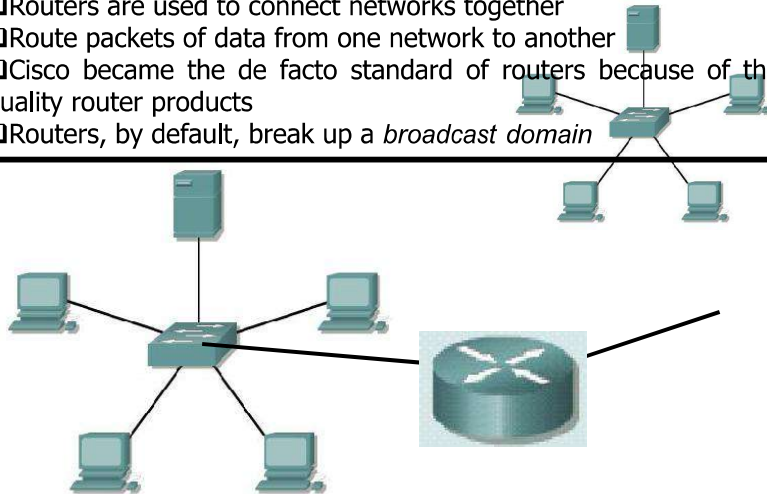

Network Topologies


Network topology defines the structure of the network.

One part of the topology definition is the physical topology, which is the actual layout of the wire or media.

The other part is the logical topology, which defines how the media is accessed by the hosts for sending data.


Bus Topology

- ☐ A bus topology uses a single backbone cable that is terminated at both ends.
- ☐ All the hosts connect directly to this backbone.

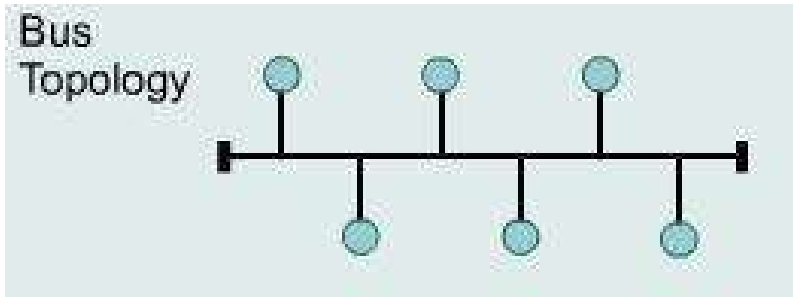


Ring Topology

- ☐ A ring topology connects one host to the next and the last host to the first.
- ☐ This creates a physical ring of cable.

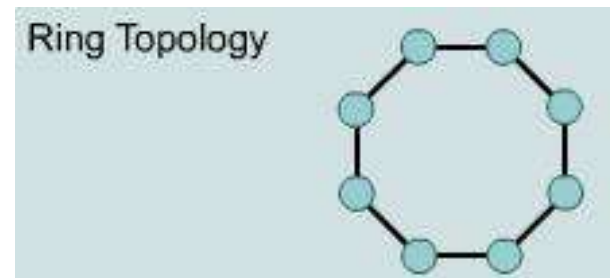


Star Topology

❑ A star topology connects all cables to a central point of concentration.

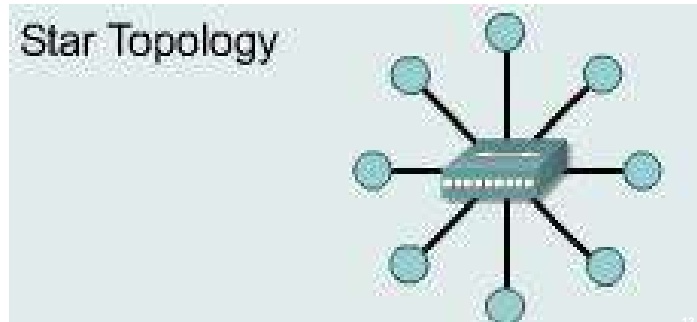


Extended Star Topology

❑ An extended star topology links individual stars together by connecting the hubs and/or switches. This topology can extend the scope and coverage of the network.

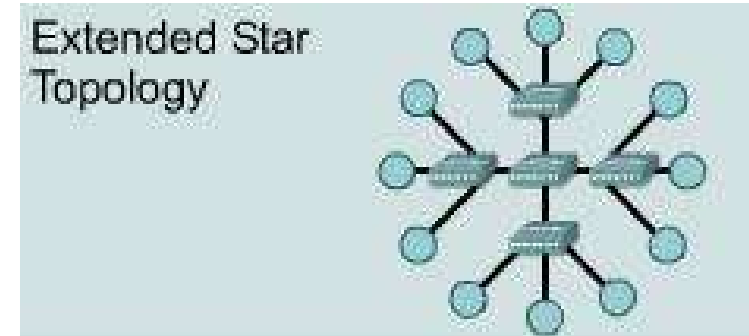

Mesh Topology

- ❑ A mesh topology is implemented to provide as much protection as possible from interruption of service.
- ❑ Each host has its own connections to all other hosts.
- ❑ Although the Internet has multiple paths to any one location, it does not adopt the full mesh topology.

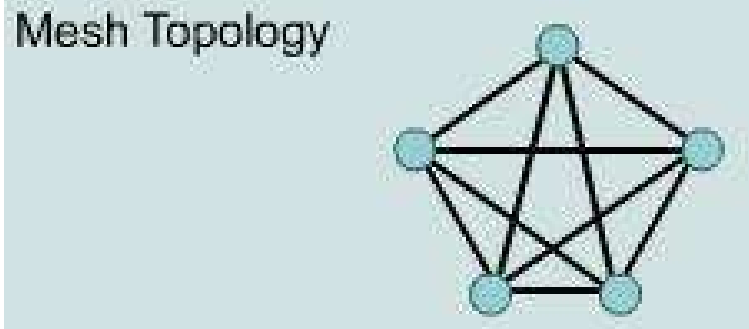

LANs, MANs, & WANs

❑ One early solution was the creation of local-area network (LAN) standards which provided an open set of guidelines for creating network hardware and software, making equipment from different companies compatible.


❑ What was needed was a way for information to move efficiently and quickly, not only within a company, but also from one business to another.

❑ The solution was the creation of metropolitan-area networks (MANs) and wide-area networks (WANs).

LANs are designed to:

- Operate within a limited geographic area
- Allow multi-access to high-bandwidth media
- Control the network privately under local administration
- Provide full-time connectivity to local services
- Connect physically adjacent devices

Using:

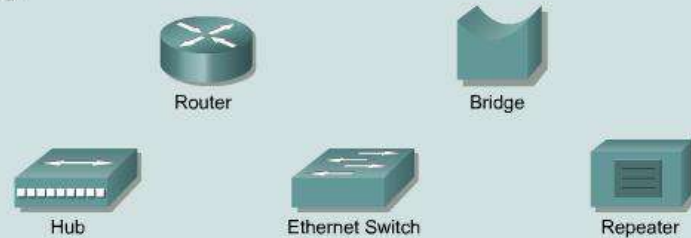

WANs are designed to:


- Operate over a large geographical area
- Allow access over serial interfaces operating at lower speeds
- Provide full-time and part-time connectivity
- Connect devices separated over wide, even global areas

Using:



Virtual Private Network

A VPN is a private network that is constructed within a public network infrastructure such as the global Internet. Using VPN, a telecommuter can access the network of the company headquarters through the Internet by building a secure tunnel between the telecommuter's PC and a VPN router in the headquarters.

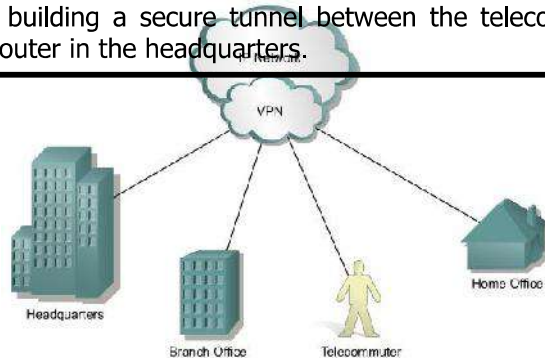


Bandwidth

Why bandwidth is important:

- Bandwidth is limited by physics and technology
- Bandwidth is not free
- Bandwidth requirements are growing at a rapid rate
- Bandwidth is critical to network performance


Bandwidth is like the number of lanes on a highway.




Measuring Bandwidth

Unit of Bandwidth	Abbreviation	Equivalence
Bits per second	bps	1 bps = fundamental unit of bandwidth
Kilobits per second	kbps	1 kbps = ~1,000 bps = 10^3 bps
Megabits per second	Mbps	1 Mbps = ~1,000,000 bps = 10^6 bps
Gigabits per second	Gbps	1 Gbps = ~1,000,000,000 bps = 10^9 bps
Terabits per second	Tbps	1 Tbps = ~1,000,000,000,000 bps = 10^{12} bps


Internetworking Devices

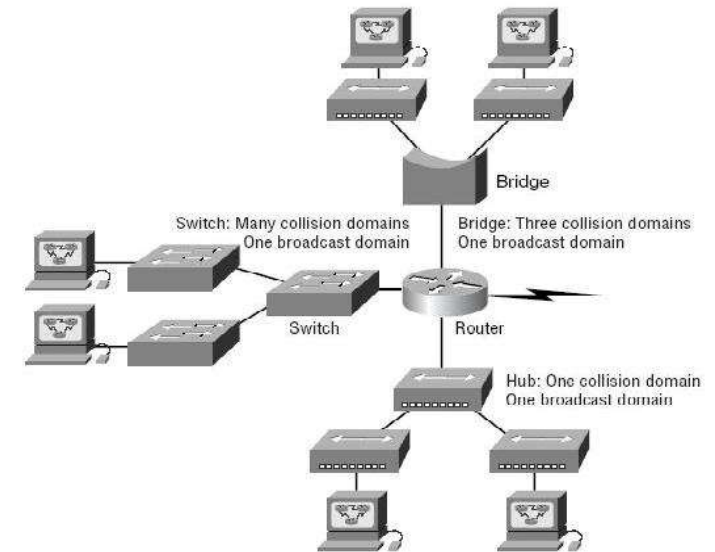

What Are The Components Of A Network ?

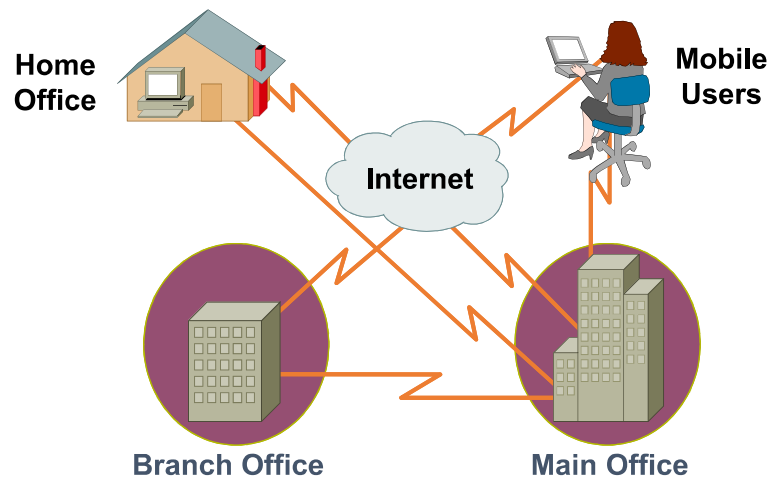

Network Structure & Hierarchy

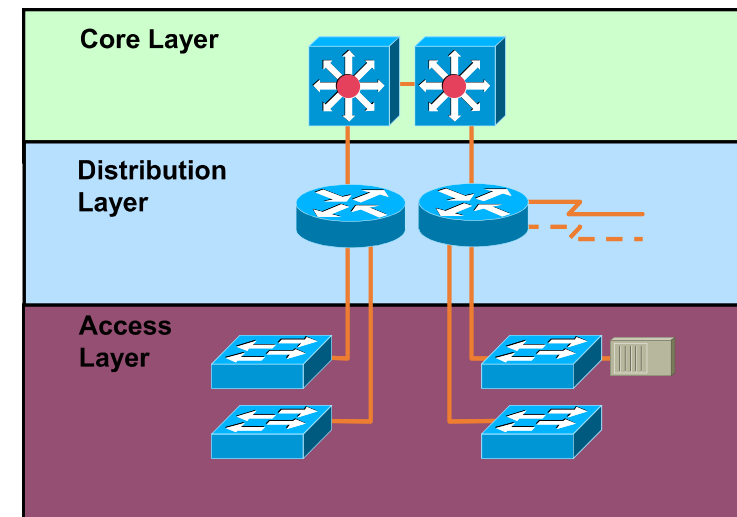

Institute of Electrical and Electronics Engineers (IEEE) 802 Standards

- ❑ IEEE 802.1: Standards related to network management.
- ❑ IEEE 802.2: General standard for the data link layer in the OSI Reference Model. The IEEE divides this layer into two sublayers -- the logical link control (LLC) layer and the media access control (MAC) layer.
- ❑ IEEE 802.3: Defines the MAC layer for bus networks that use CSMA/CD. This is the basis of the Ethernet standard.
- ❑ IEEE 802.4: Defines the MAC layer for bus networks that use a token-passing mechanism (token bus networks).
- ❑ IEEE 802.5: Defines the MAC layer for token-ring networks.
- ❑ IEEE 802.6: Standard for Metropolitan Area Networks (MANs)



Why do we need the OSI Model?

- ❑ To address the problem of networks increasing in size and in number, the International Organization for Standardization (ISO) researched many network schemes and recognized that there was a need to create a network model
- ❑ This would help network builders implement networks that could communicate and work together
- ❑ ISO therefore, released the OSI reference model in 1984.


Don't Get Confused.

ISO - International Organization for Standardization

OSI - Open System Interconnection

IOS - Internetwork Operating System


To avoid confusion, some people say "International Standard Organization."

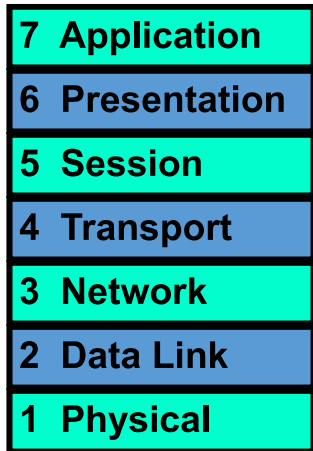


The OSI Model will be used throughout your entire networking career!

Memorize it!

OSI Model

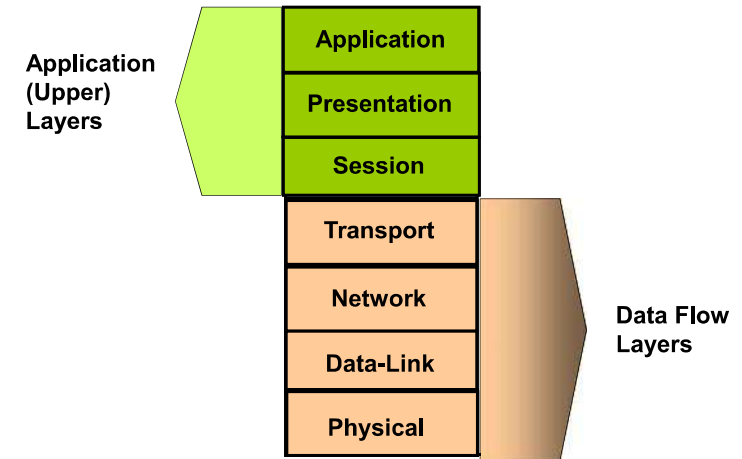

Layer 7 - The Application Layer

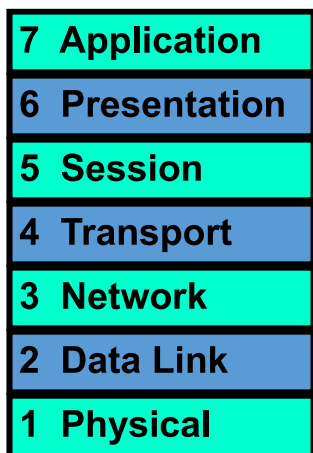


This layer deal with networking applications.

Examples:

- Σ Email
- Σ Web browsers

PDU - User Data

Layer 6 - The Presentation Layer

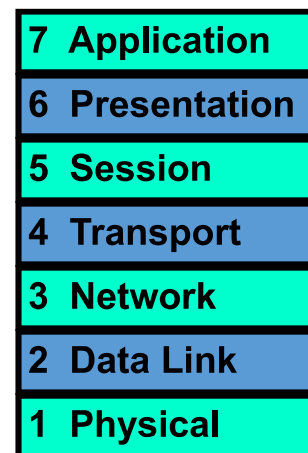


This layer is responsible for presenting the data in the required format which may include:

- ☐ Code Formatting
- ☐ Encryption
- ☐ Compression

PDU - Formatted Data

Each of the layers have Protocol Data Unit (PDU)

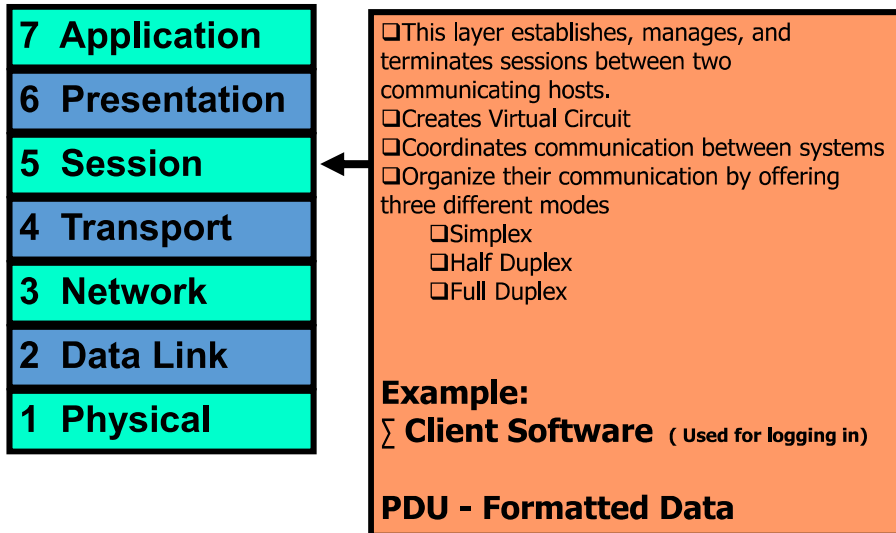


Half Duplex

- It uses only one wire pair with a digital signal running in both directions on the wire.
- It also uses the CSMA/CD protocol to help prevent collisions and to permit retransmitting if a collision does occur.
- If a hub is attached to a switch, it must operate in half-duplex mode because the end stations must be able to detect collisions.
- Half-duplex Ethernet—typically 10BaseT—is only about 30 to 40 percent efficient because a large 10BaseT network will usually only give you 3 to 4Mbps—at most.


Full Duplex

In a network that uses twisted-pair cabling, one pair is used to carry the transmitted signal from one node to the other node. A separate pair is used for the return or received signal. It is possible for signals to pass through both pairs simultaneously. The capability of communication in both directions at once is known as full duplex.

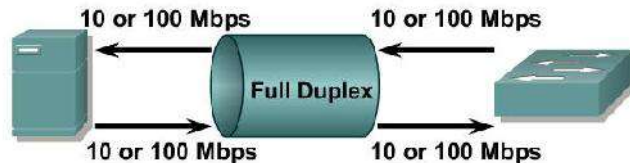


- Doubles bandwidth between nodes
- Collision-free transmission
- Two 10- or 100- Mbps data paths


Layer 4 - The Transport Layer

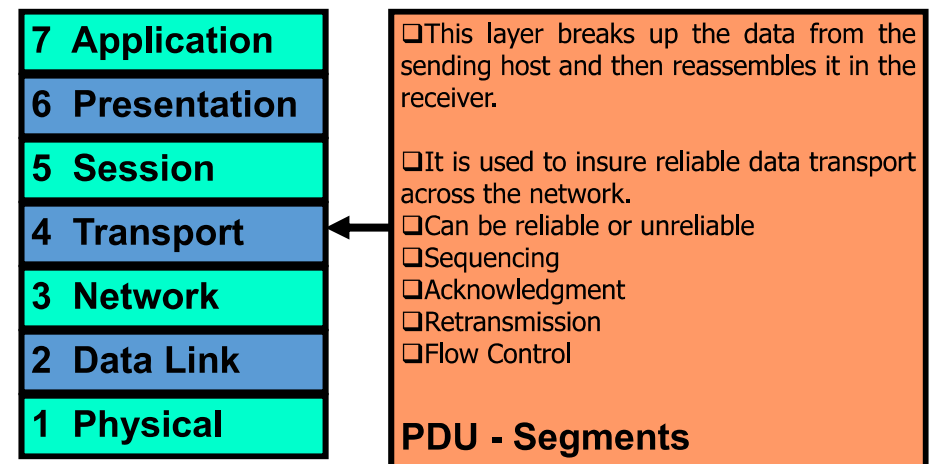


Layer 3 - The Network Layer

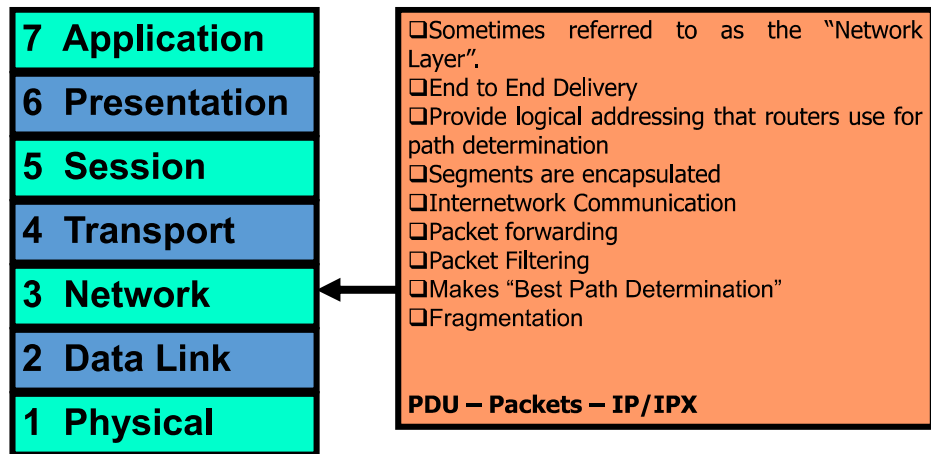


Layer 2 - The Data Link Layer

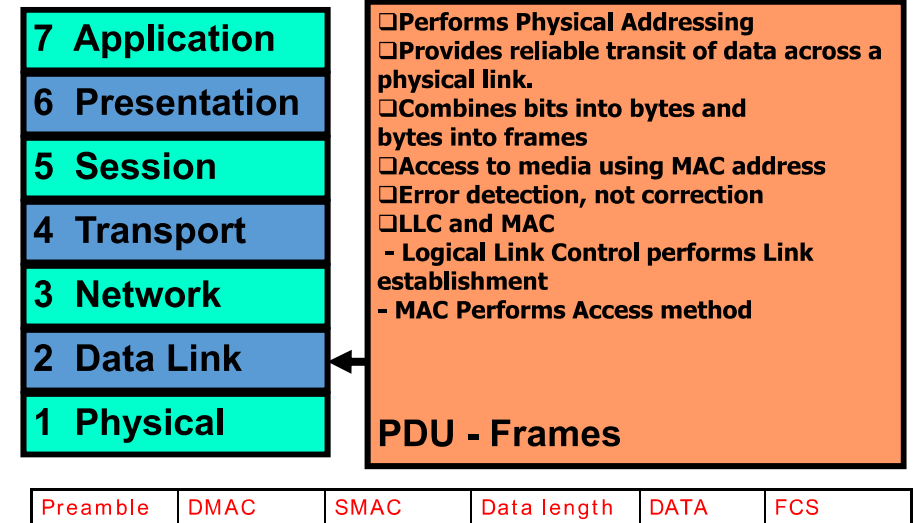


Layer 1 - The Physical Layer

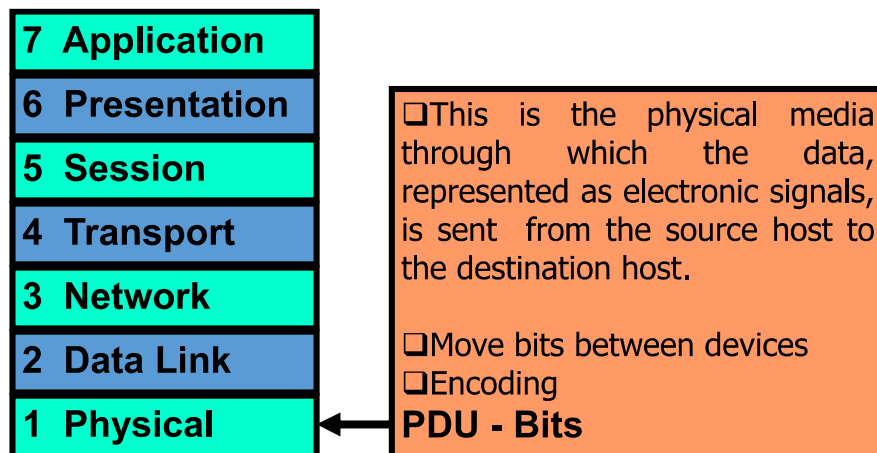

Data Encapsulation

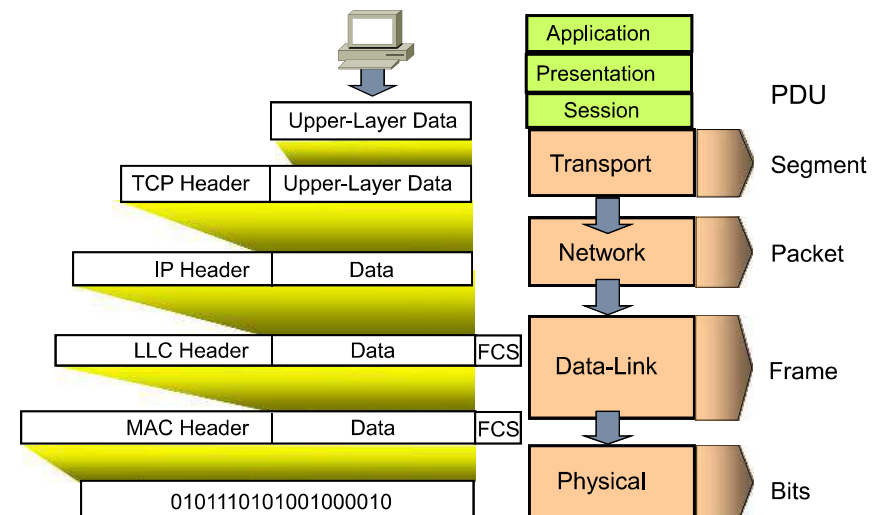

Data Encapsulation

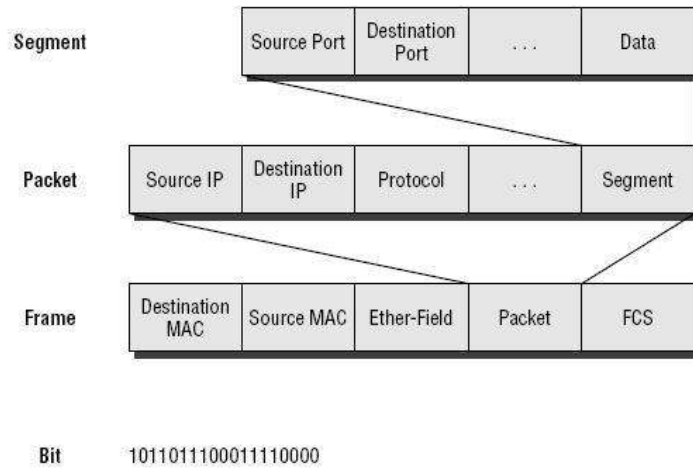


OSI Model Analogy Application Layer - Source Host



After riding your new bicycle a few times in Villejuif, you decide to give it to a friend who lives in Rabat.

OSI Model Analogy Presentation Layer - Source Host

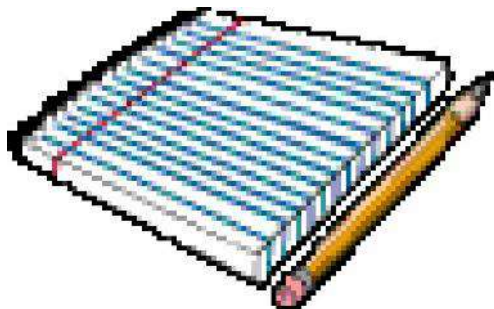


Make sure you have the proper directions to disassemble and reassemble the bicycle.

OSI Model Analogy Session Layer - Source Host




Call your friend and make sure you have his correct address.

OSI Model Analogy
Transport Layer - Source Host

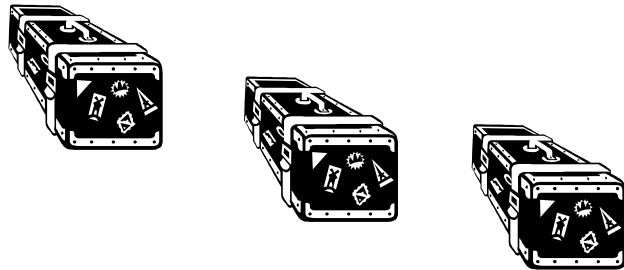


Disassemble the bicycle and put different pieces in different boxes. The boxes are labeled "1 of 3", "2 of 3", and "3 of 3".

OSI Model Analogy
Data Link Layer – Source Host

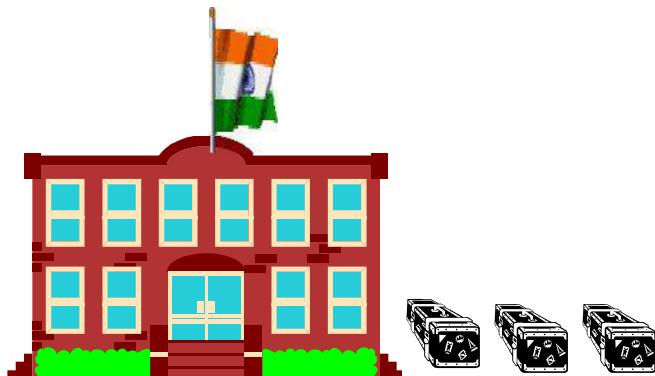

Villejuif post office takes possession of the boxes.

OSI Model Analogy
Network Layer - Source Host

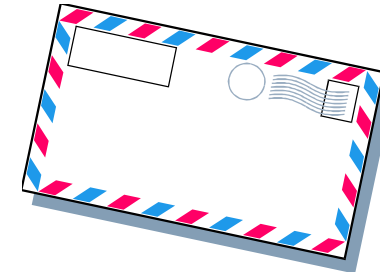


Put your friend's complete mailing address (and yours) on each box. Since the packages are too big for your mailbox (and since you don't have enough stamps) you determine that you need to go to the post office.

OSI Model Analogy
Physical Layer - Media




The boxes are flown from Orly to Rabat.

OSI Model Analogy
Data Link Layer - Destination

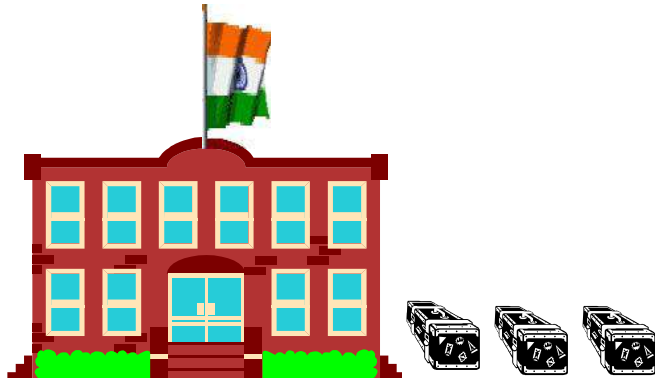

Rabat post office receives your boxes.

OSI Model Analogy
Network Layer - Destination

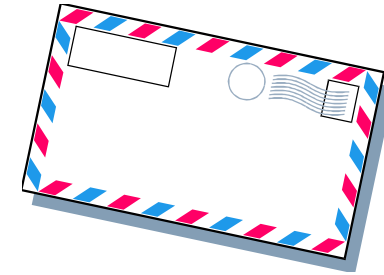

Upon examining the destination address, Rabat post office determines that your boxes should be delivered to your written home address.

OSI Model Analogy
Transport Layer - Destination



Your friend calls you and tells you he got all 3 boxes and one of his friend named BOB is reassembling the bicycle.

OSI Model Analogy
Session Layer - Destination



Your friend hangs up because he is done talking to you.

OSI Model Analogy

Presentation Layer - Destination



After finishing to reassemble the bicycle, your friend receives his present.


OSI Model Analogy

Application Layer - Destination



Your friend enjoys riding his new bicycle in Rabat.

Data Flow Through a Network

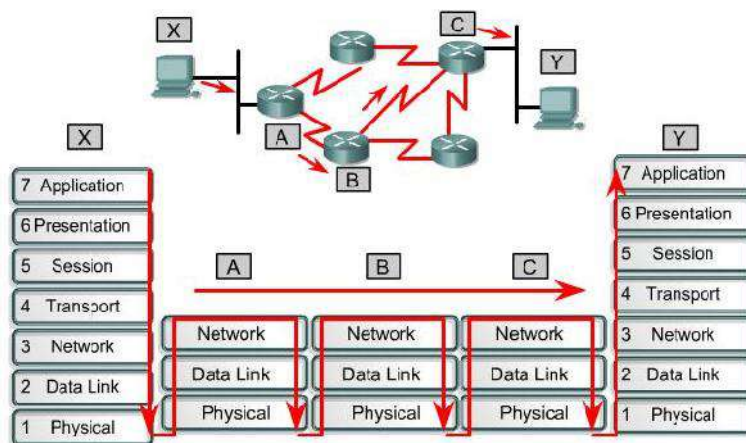


Data flow in a network focuses on layers one, two and three of the OSI model. This is after being transmitted by the sending host and before arriving at the receiving host.

Type of Transmission

- ☐ Unicast
- ☐ Multicast
- ☐ Broadcast

Type of Transmission

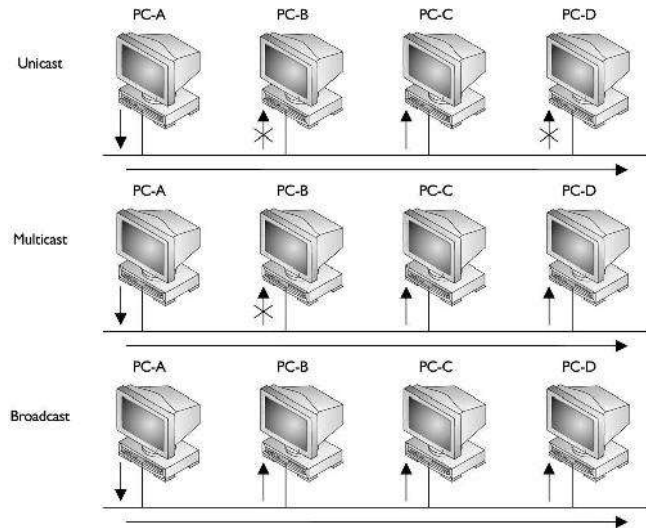

Broadcast Domain

- ❑ A group of devices receiving broadcast frames initiating from any device within the group
- ❑ Routers do not forward broadcast frames, broadcast domains are not forwarded from one broadcast to another.

Collision

- ❑ The effect of two nodes sending transmissions simultaneously in Ethernet. When they meet on the physical media, the frames from each node collide and are damaged.

Collision Domain

- ❑ The network area in Ethernet over which frames that have collided will be detected.
- ❑ Collisions are propagated by hubs and repeaters
- ❑ Collisions are **Not** propagated by switches, routers, or bridges

Physical Layer


Defines

- Media type
- Connector type
- Signaling type




802.3 is responsible for LANs based on the **Carrier Sense Multiple Access Collision Detect** access methodology.
Ethernet is an example of a **CSMA/CD** network.

Physical Layer: Ethernet/802.3

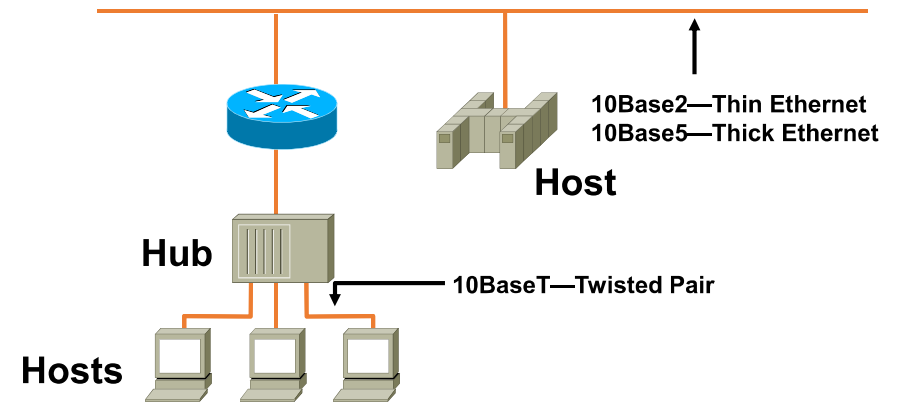


Device Used At Layer 1

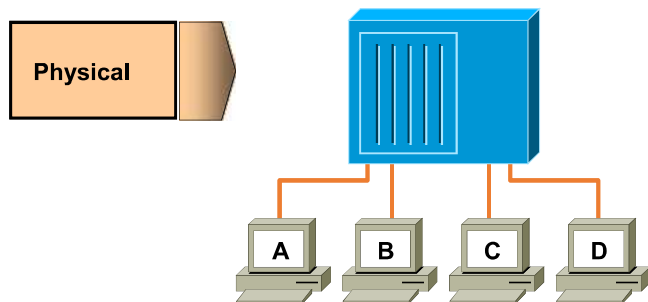


- All devices are in the same collision domain.
- All devices are in the same broadcast domain.
- Devices share the same bandwidth.

Hubs & Collision Domains


- More end stations means more collisions.
- CSMA/CD is used.

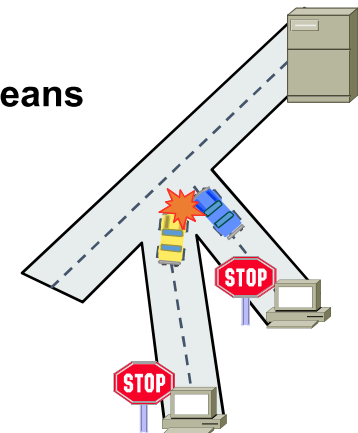

MAC Layer—802.3

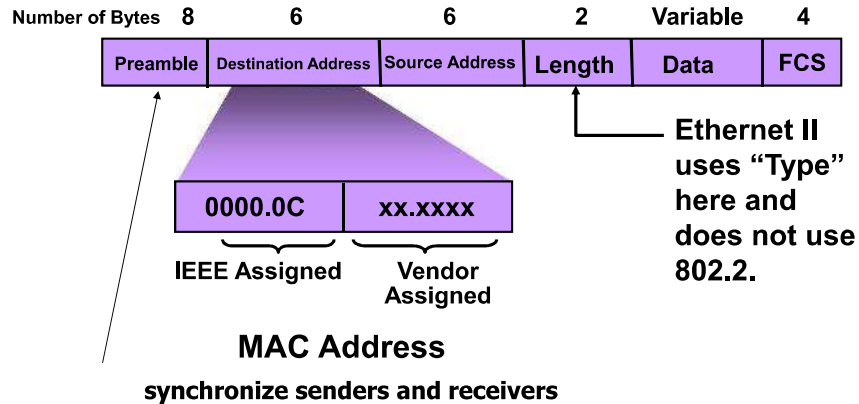


Devices On Layer 2 : (Switches & Bridges)

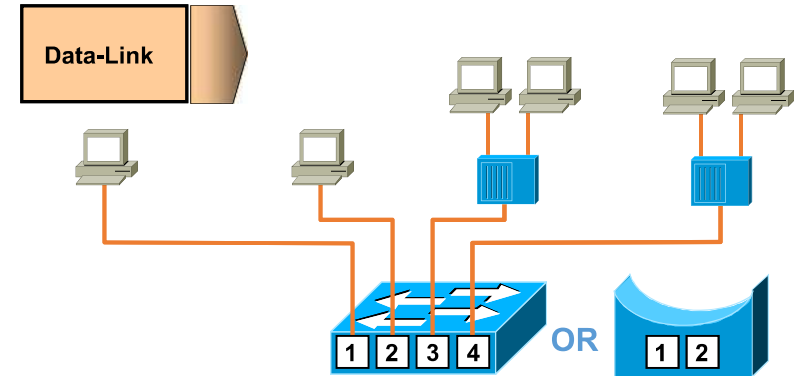

- Each segment has its own collision domain.
- All segments are in the same broadcast domain.

Switches

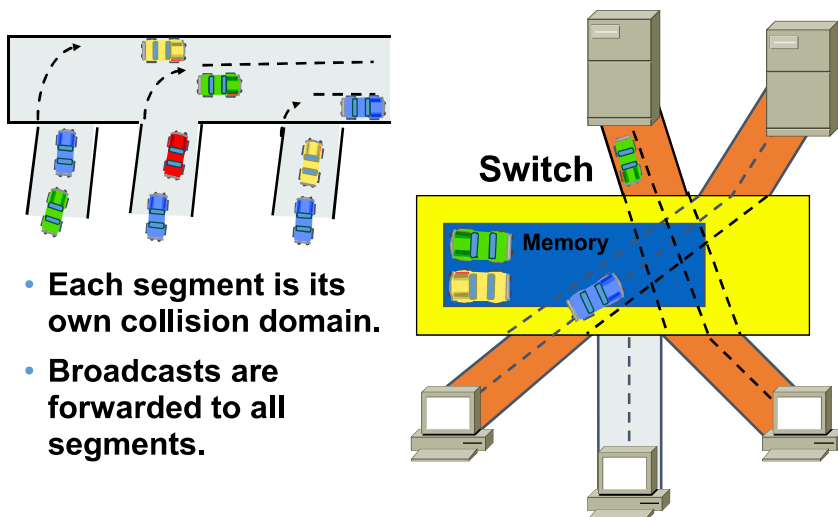

- Each segment is its own collision domain.
- Broadcasts are forwarded to all segments.


Layer 3 : Network Layer

- Defines logical source and destination addresses associated with a specific protocol
- Defines paths through network

Network	IP, IPX			
Data-Link	Ethernet	802.2	HDLC	Frame Relay
Physical		802.3	EIA/TIA-232 V.35	

Layer 3 : (cont.) : IP packet and address.


Network Layer End-Station Packet

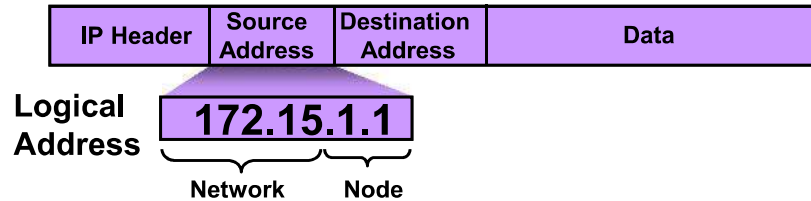

- ❑ Route determination occurs at this layer, so a packet must include a source and destination address.
- ❑ Network-layer addresses have two components: a network component for internetwork routing, and a node number for a device-specific address.

Device On Layer 3 Router

- Broadcast control
- Multicast control
- Optimal path determination
- Traffic management
- Logical addressing
- Connects to WAN services

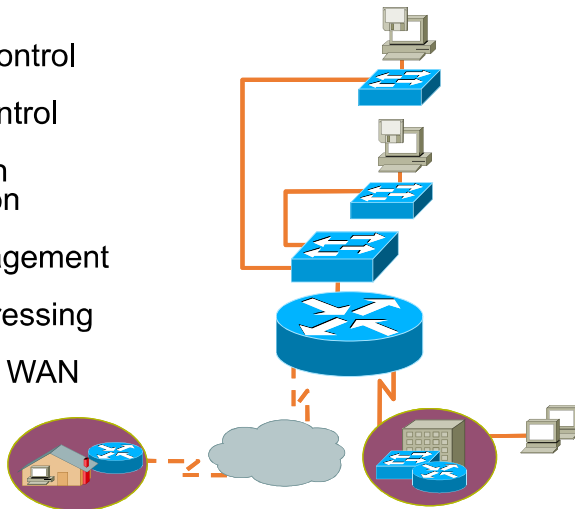

Layer 3 (cont.)


	Address		Mask	
	172.16.122.204		255.255.0.0	
	172	16	122	204
Binary Address	10101100	00010000	01111010	11001100
	255	255	0	0
Binary Mask	11111111	11111111	00000000	00000000
	Network		Host	

Layer 4 : Transport Layer


- Distinguishes between upper-layer applications
- Establishes end-to-end connectivity between applications
- Defines flow control
- Provides reliable or unreliable services for data transfer

Transport	TCP	UDP	SPX
Network	IP		IPX

Reliable Service

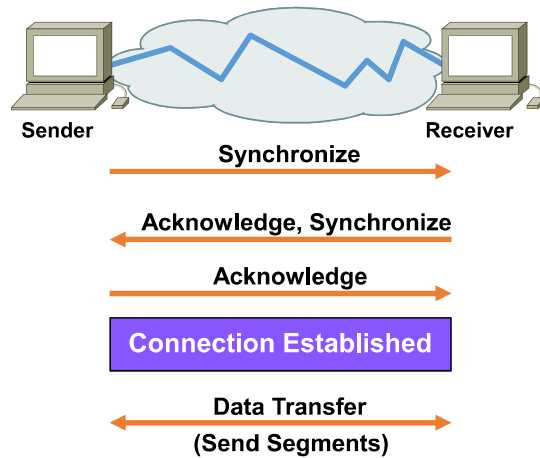

Devices : How They Operate?

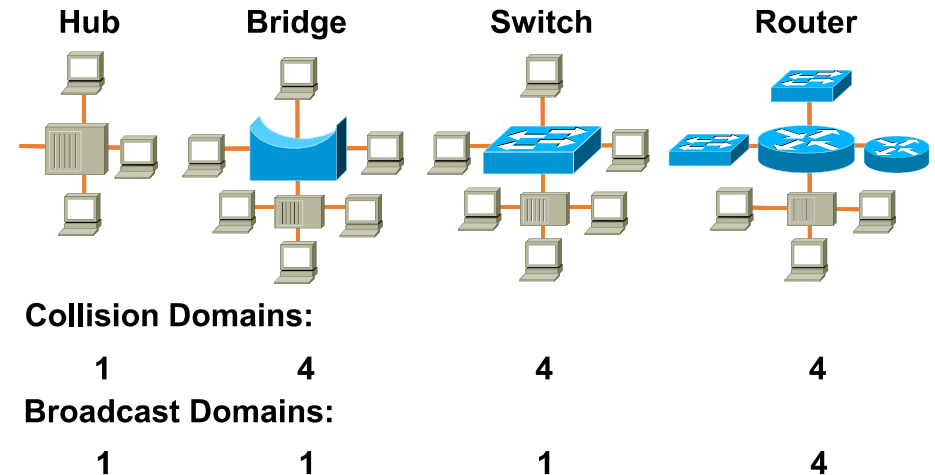

Why Another Model?


Although the OSI reference model is universally recognized, the historical and technical open standard of the Internet is Transmission Control Protocol / Internet Protocol (TCP/IP).

The TCP/IP reference model and the TCP/IP protocol stack make data communication possible between any two computers, anywhere in the world, at nearly the speed of light.


The U.S. Department of Defense (DoD) created the TCP/IP reference model because it wanted a network that could survive any conditions, even a nuclear war.

TCP/IP MODEL


TCP/IP Protocol Stack

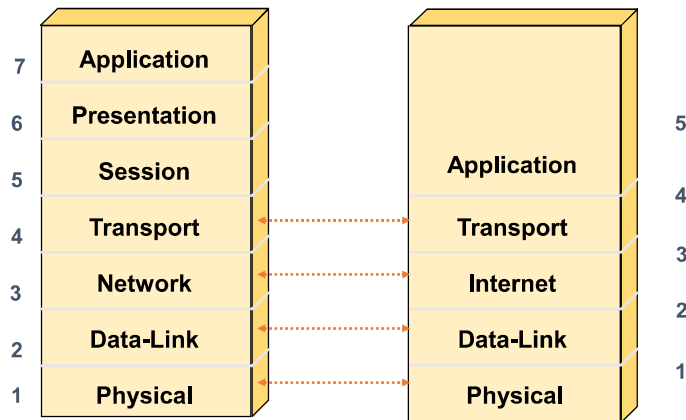


Application Layer Overview

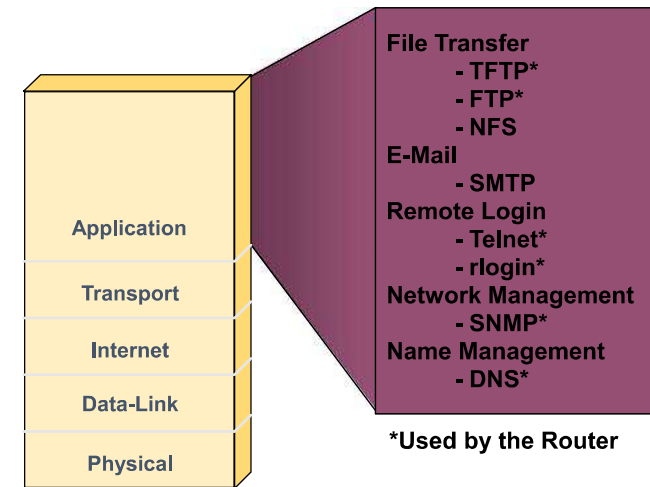


Transport Layer Overview

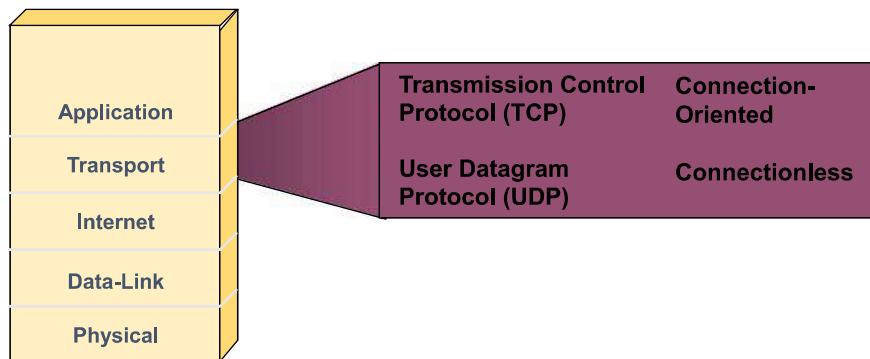


TCP Segment Format

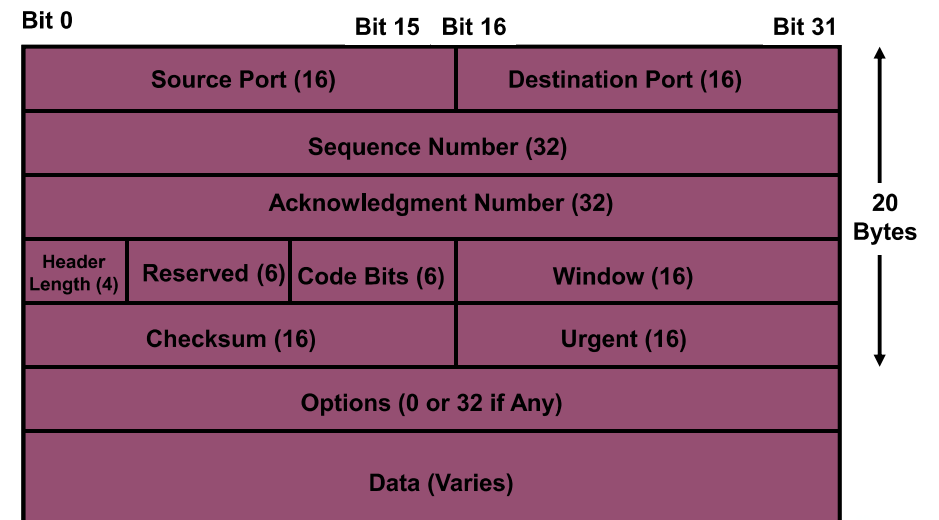


Port Numbers

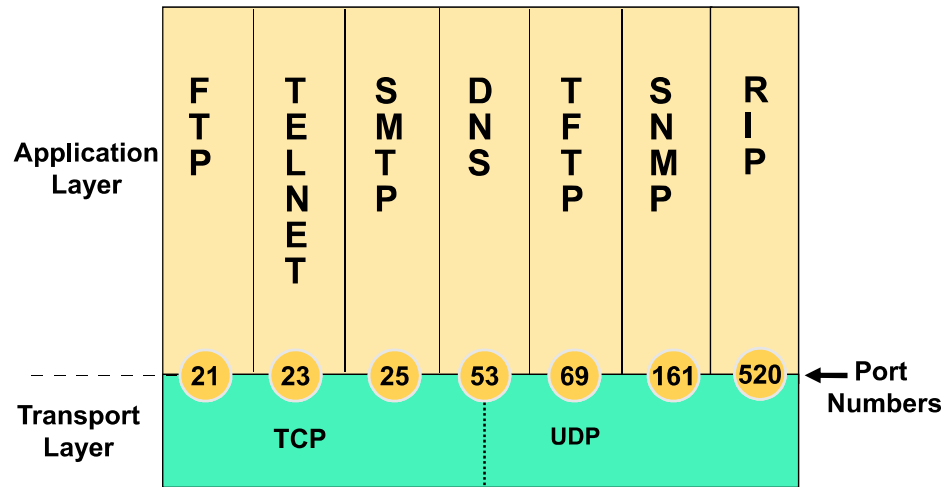

TCP Port Numbers

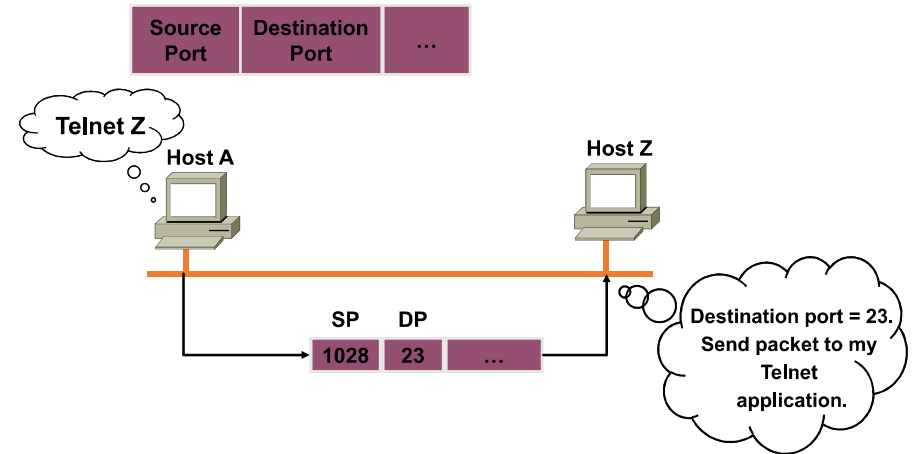


TCP Port Numbers

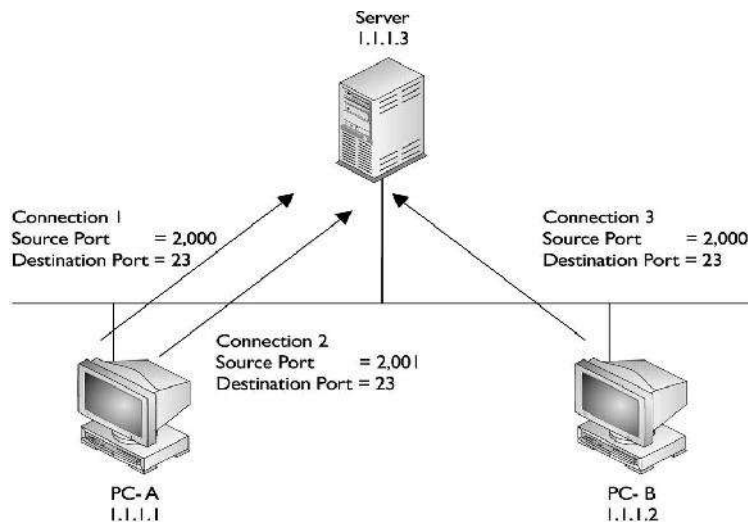


How does the server differentiate between connections ?

TCP Three-Way Handshake/Open Connection

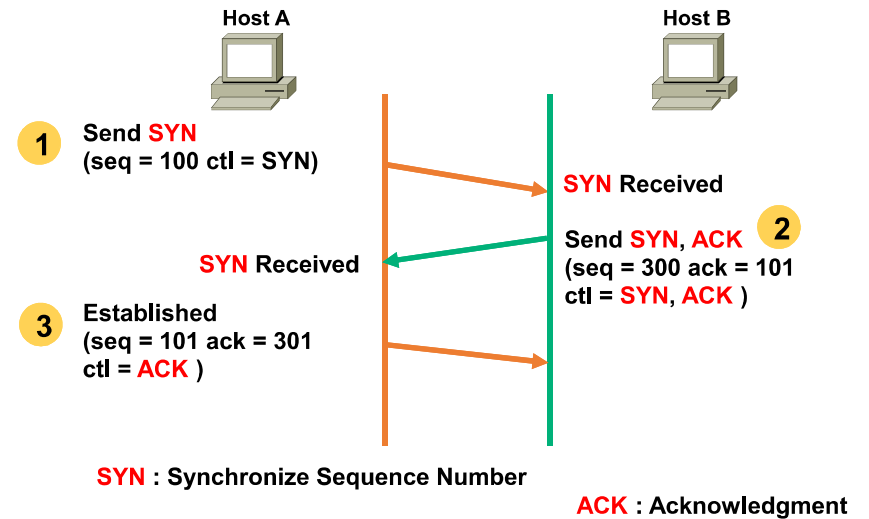


Opening & Closing Connection

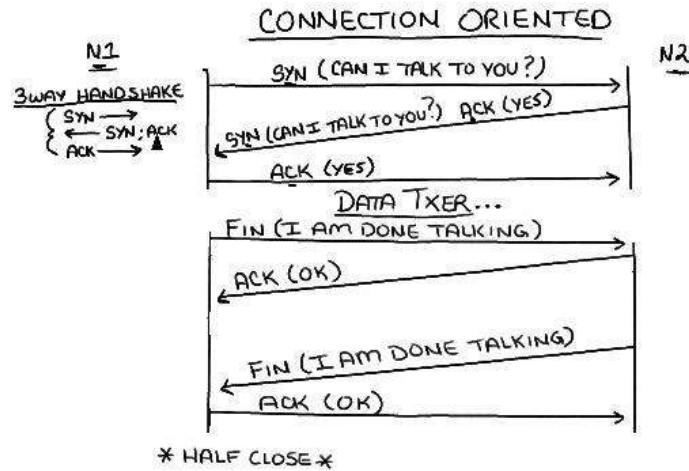


Windowing

- Windowing in networking means the quantity of data segments which is measured in **bytes** that a machine can transmit/send on the network without receiving an acknowledgement

TCP Simple Acknowledgment

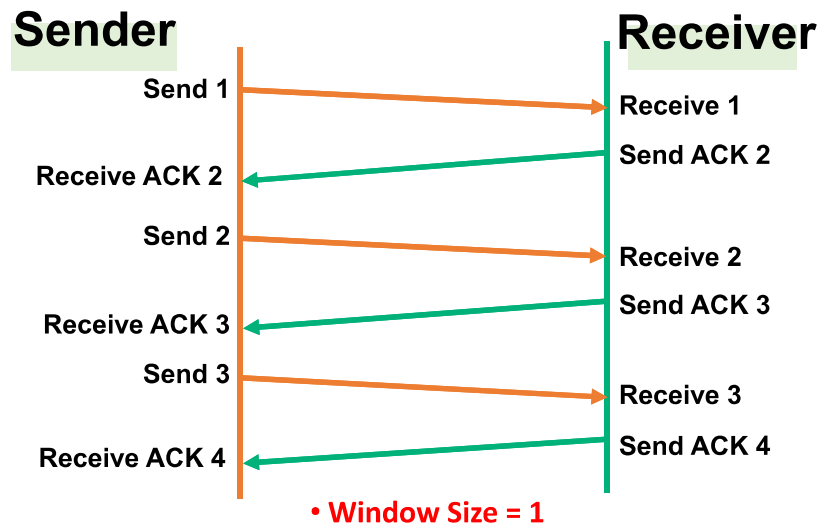

TCP Sequence and Acknowledgment Numbers

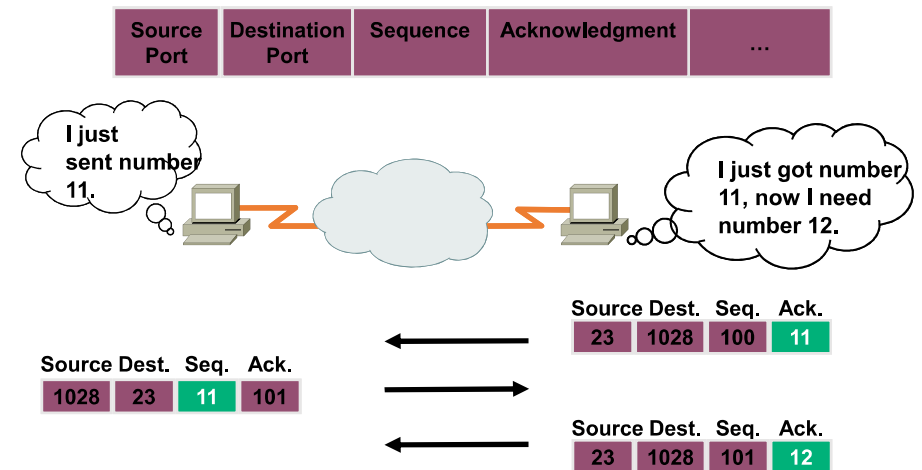


TCP provides full-duplex communication


Windowing

- There are two window sizes —one set to 1 and one set to 3.
- When you've configured a window size of 1, the sending machine waits for an acknowledgment for each data segment it transmits before transmitting another
- If you've configured a window size of 3, it's allowed to transmit three data segments before an acknowledgment is received.

Windowing

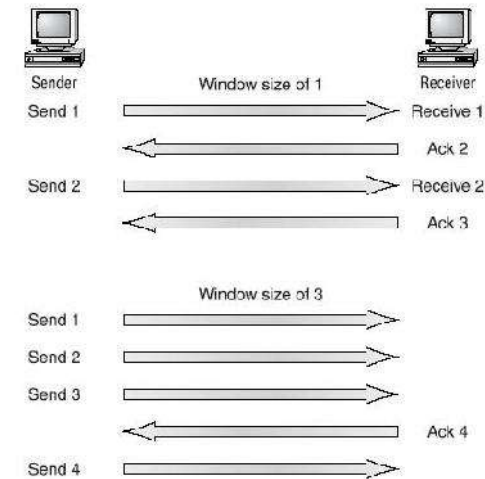


Transport Layer Reliable Delivery

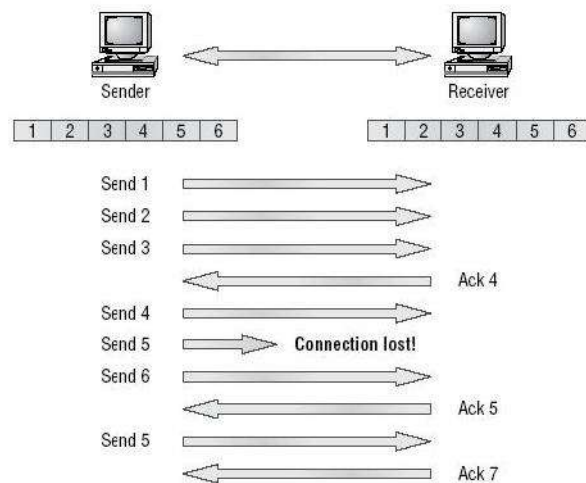

Flow Control

- ❑ Another function of the transport layer is to provide optional flow control.
- ❑ Flow control is used to ensure that networking devices don't send too much information to the destination, overflowing its receiving buffer space, and causing it to drop the sent information
- ❑ The purpose of flow control is to ensure the destination doesn't get overrun by too much information sent by the source

Flow Control

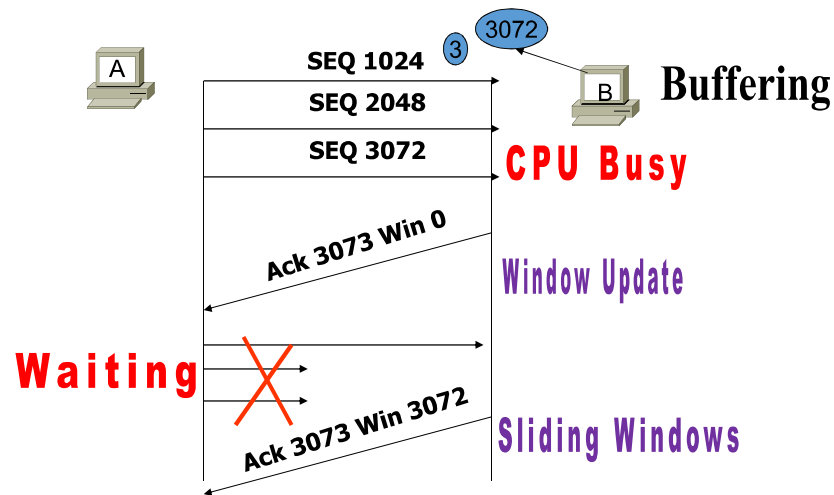

User Datagram Protocol (UDP)

User Datagram Protocol (UDP) is the connectionless transport protocol in the TCP/IP protocol stack.


UDP is a simple protocol that exchanges datagrams, without acknowledgments or guaranteed delivery. Error processing and retransmission must be handled by higher layer protocols.

UDP is designed for applications that do not need to put sequences of segments together.

The protocols that use **UDP** include:

- **TFTP** (Trivial File Transfer Protocol)
- **SNMP** (Simple Network Management Protocol)
- **DHCP** (Dynamic Host Control Protocol)
- **DNS** (Domain Name System)

UDP Segment Format

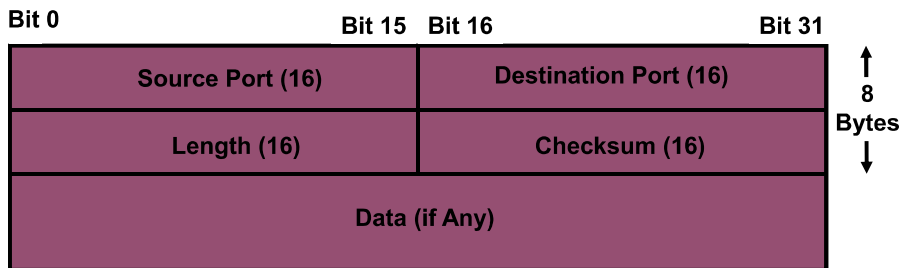


- **No sequence or acknowledgment fields**

TCP vs UDP


TCP	UDP
Sequenced	Unsequenced
Reliable	Unreliable
Connection-oriented	Connectionless
Virtual circuit	Low overhead
Acknowledgments	No acknowledgment
Windowing flow control	No windowing or flow control

Internet Layer Overview

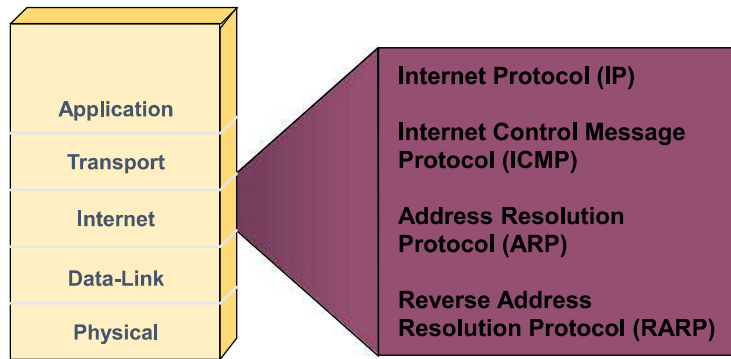


- In the OSI reference model, the network layer corresponds to the TCP/IP Internet layer.

IP Datagram

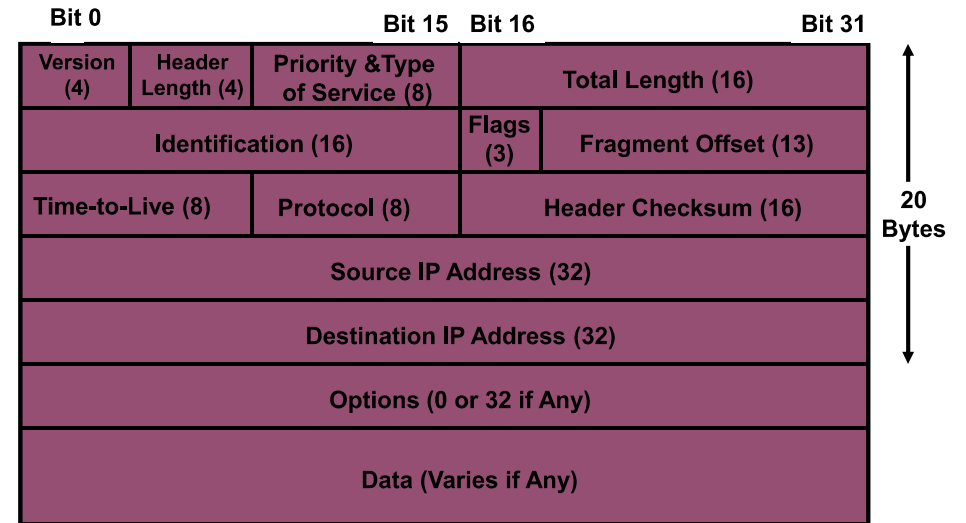


Protocol Field

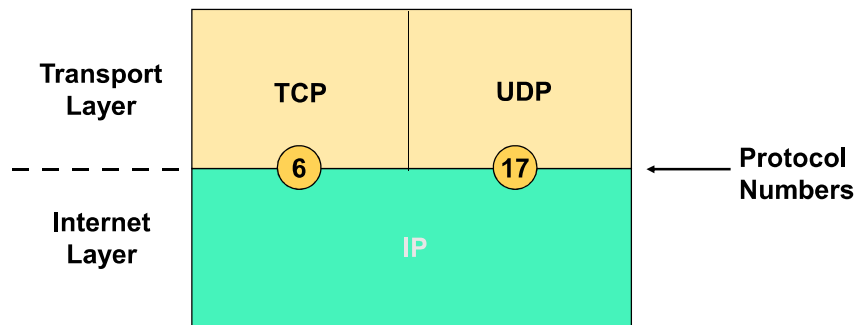


- Determines destination upper-layer protocol


Internet Control Message Protocol

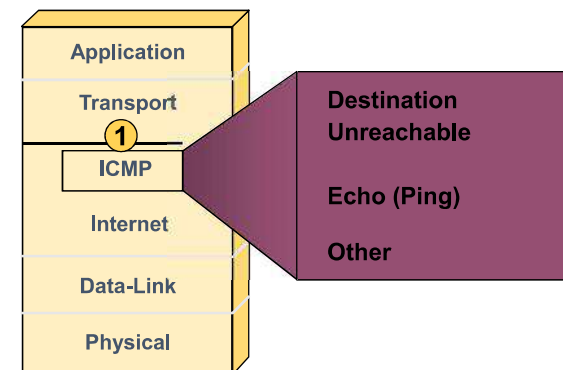

101 Address Resolution Protocol

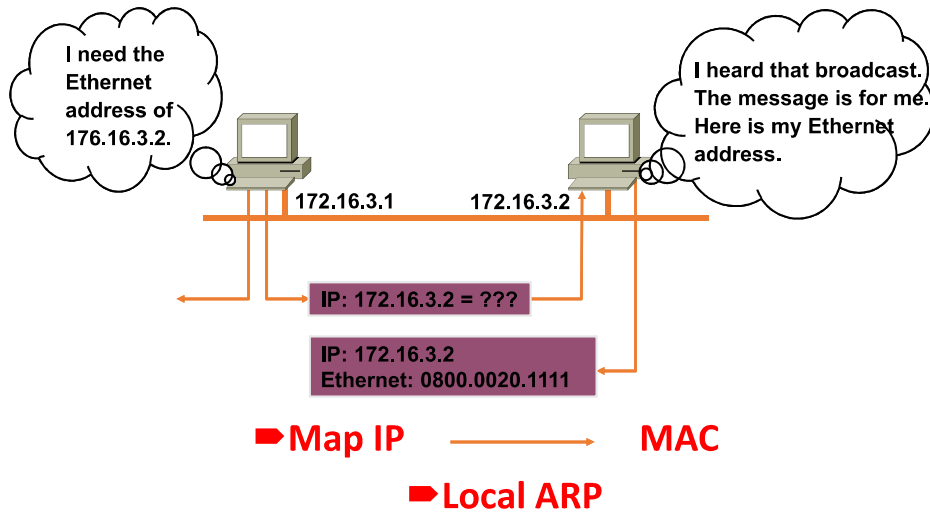

102 Reverse ARP

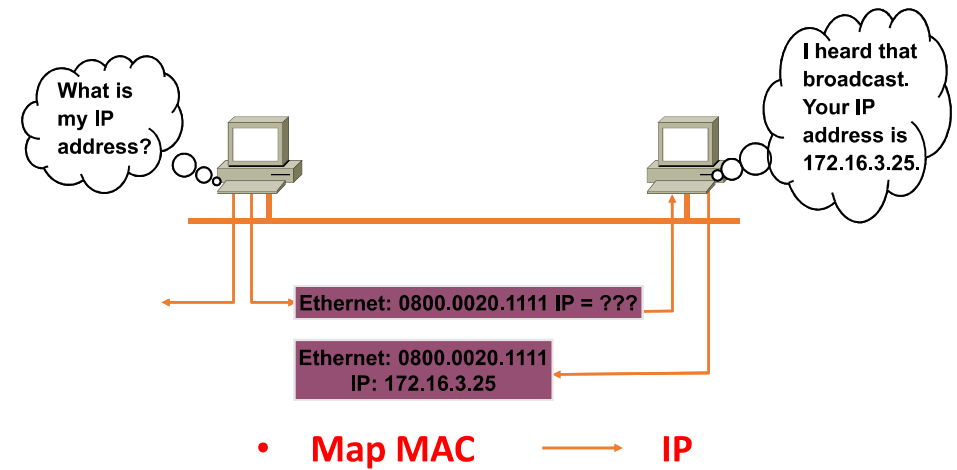


Origin of Ethernet

The Networking Media

- ❑ Found by Xerox Palo Alto Research Center (PARC) in 1975
- ❑ Original designed as a 2.94 Mbps system to connect 100 computers on a 1 km cable
- ❑ Later, Xerox, Intel and DEC drew up a standard support 10 Mbps – Ethernet II
- ❑ Basis for the IEEE's 802.3 specification
- ❑ Most widely used LAN technology in the world

10 Mbps IEEE Standards - 10BaseT

- 10BaseT $\Rightarrow$ 10 Mbps, baseband, over Twisted-pair cable
- Running Ethernet over twisted-pair wiring as specified by IEEE 802.3
- Configure in a star pattern
- Twisting the wires reduces EMI
- Fiber Optic has no EMI

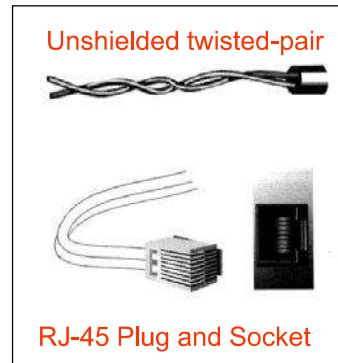

Twisted Pair Cables

❑ Unshielded Twisted Pair Cable (UTP)

- ❑ most popular
- ❑ maximum length 100 m
- ❑ prone to noise

Category 1	Voice transmission of traditional telephone
Category 2	For data up to 4 Mbps, 4 pairs full-duplex
Category 3	For data up to 10 Mbps, 4 pairs full-duplex
Category 4	For data up to 16 Mbps, 4 pairs full-duplex
Category 5	For data up to 100 Mbps, 4 pairs full-duplex
Category 6	For data up to 1000 Mbps, 4 pairs full-duplex


Baseband VS Broadband

❑ Baseband Transmission

- ❖ Entire channel is used to transmit a single digital signal
- ❖ Complete **bandwidth** of the cable is used by a single signal
- ❖ The transmission distance is **shorter**
- ❖ The electrical interference is **lower**

❑ Broadband Transmission

- ❖ Use **analog** signaling and a range of frequencies
- ❖ **Continuous** signals flow in the form of waves
- ❖ Support **multiple analog transmission** (channels)

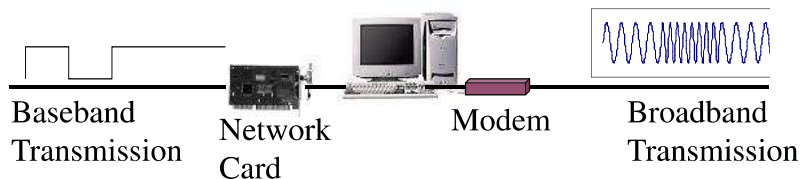


Straight-through cable



Straight-through cable pinout

Pin 1	-----	Pin 1
Pin 2	-----	Pin 2
Pin 3	-----	Pin 3
Pin 4	-----	Pin 4
Pin 5	-----	Pin 5
Pin 6	-----	Pin 6
Pin 7	-----	Pin 7
Pin 8	-----	Pin 8


Crossover cable



Crossover cable

From	To
1	3
2	6
3	1
4	none
5	none
6	2
7	none
8	none

Rollover cable

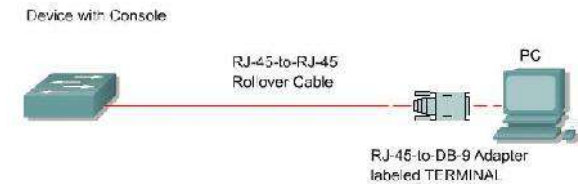

- PCs require an RJ-45 to DB-9 or RJ-45 to DB-25 adapter.
- CCNA port settings are 9600 bps, 8 data bits, no parity, 1 stop bit, no flow control.
- This provides out-of-band console access.
- AUX switch port may be used for a modem-connected console.

Rollover cable pinout

Pin 1	-----	Pin 8
Pin 2	-----	Pin 7
Pin 3	-----	Pin 6
Pin 4	-----	Pin 5
Pin 5	-----	Pin 4
Pin 6	-----	Pin 3
Pin 7	-----	Pin 2
Pin 8	-----	Pin 1

Straight-Through or Crossover?

- ☐ Use straight-through cables for the following cabling:
 - ☐ Switch to router
 - ☐ Switch to PC or server
 - ☐ Hub to PC or server
- ☐ Use crossover cables for the following cabling:
 - ☐ Switch to switch
 - ☐ Switch to hub
 - ☐ Hub to hub
 - ☐ Router to router
 - ☐ PC to PC
 - ☐ Router to PC

TCP/IP Math

Decimal to Binary

172 – Base 10

172	
100	100
70	
2	
1	
1000	
172	

$10^0 = 1$
 $10^1 = 10$
 $10^2 = 100$
 $10^3 = 1000$

10101100– Base 2

10101100	
128	128
64	
32	32
16	
8	8
4	
2	2
1	0
172	

$2^0 = 1$
 $2^1 = 2$
 $2^2 = 4$
 $2^3 = 8$
 $2^4 = 16$
 $2^5 = 32$
 $2^6 = 64$
 $2^7 = 128$

$$10110_2 = (1 \times 2^4 = 16) + (0 \times 2^3 = 0) + (1 \times 2^2 = 4) + (1 \times 2^1 = 2) + (0 \times 2^0 = 0) = 22$$

Place Value	128	64	32	16	8	4	2	1
Base Exponent	$2^7 = 128$		$2^3 = 8$					
	$2^6 = 64$		$2^2 = 4$					
	$2^5 = 32$		$2^1 = 2$					
	$2^4 = 16$		$2^0 = 1$					
Number of Symbols	2							
Symbols	0, 1							
Rationale	Two-state (discrete binary) voltage systems made from transistors can be diverse, powerful, inexpensive, tiny and relatively immune to noise.							

Convert 201_{10} to binary:

201 / 2 = 100 remainder 1	↓	↑
100 / 2 = 50 remainder 0		
50 / 2 = 25 remainder 0		
25 / 2 = 12 remainder 1		
12 / 2 = 6 remainder 0		
6 / 2 = 3 remainder 0		
3 / 2 = 1 remainder 1		
1 / 2 = 0 remainder 1		

When the quotient is 0, take all the remainders in reverse order for your answer: $201_{10} = 11001001_2$

Binary to Decimal Chart


Binary Value	Decimal Value
10000000	128
11000000	192
11100000	224
11110000	240
11111000	248
11111100	252
11111110	254
11111111	255

Hex to Binary to Decimal Chart

Hexadecimal Value	Binary Value	Decimal Value
0	0000	0
1	0001	1
2	0010	2
3	0011	3
4	0100	4
5	0101	5
6	0110	6
7	0111	7
8	1000	8
9	1001	9
A	1010	10
B	1011	11
C	1100	12
D	1101	13
E	1110	14
F	1111	15

Introduction to TCP/IP Addresses

121

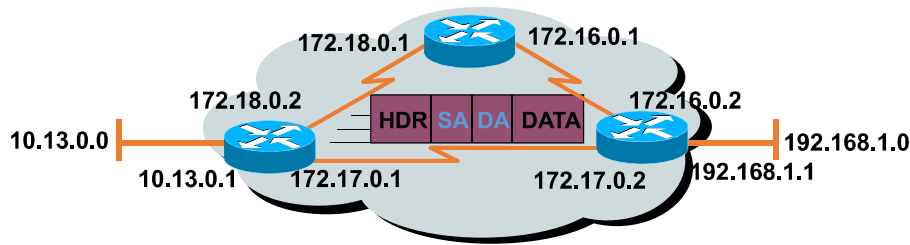

- Unique addressing allows communication between end stations.
- Path choice is based on destination address.

Location is represented by an address

IP Addressing

	32 Bits			
Dotted Decimal	Network		Host	
Maximum	255	255	255	255
Binary	1 8 9 16 17 24 25 32	1 8 9 16 17 24 25 32	1 8 9 16 17 24 25 32	1 8 9 16 17 24 25 32
Example Decimal	172	16	122	204
Example Binary	10101100	00010000	01111010	11001100

IP Address Classes


123

	8 Bits	8 Bits	8 Bits	8 Bits
Class A:	Network	Host	Host	Host
Class B:	Network	Network	Host	Host
Class C:	Network	Network	Network	Host
Class D:	Multicast			
Class E:	Research			

IP Address Classes

Bits:	1 8 9 16 17 24 25 32
Class A:	0NNNNNNN Host Host Host
	Range (1-126)
Bits:	1 8 9 16 17 24 25 32
Class B:	10NNNNNN Network Host Host
	Range (128-191)
Bits:	1 8 9 16 17 24 25 32
Class C:	110NNNNN Network Network Host
	Range (192-223)
Bits:	1 8 9 16 17 24 25 32
Class D:	1110MMMM Multicast Group Multicast Group Multicast Group
	Range (224-239)

Host Addresses

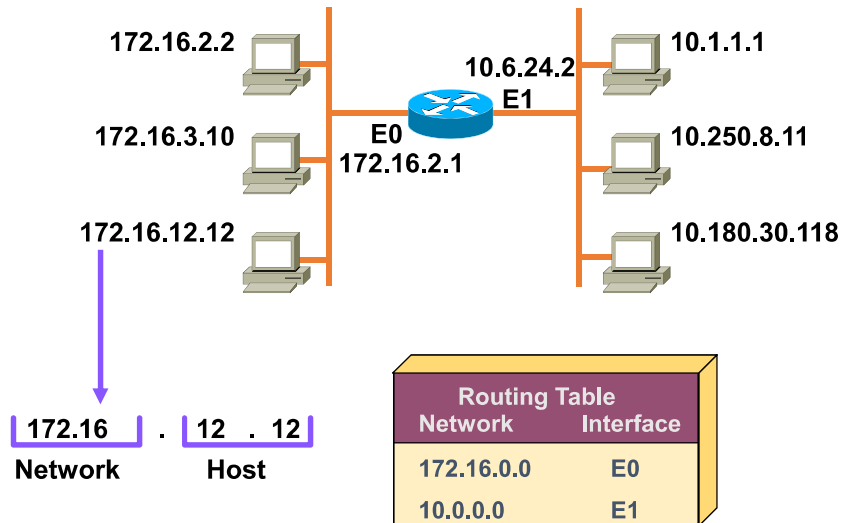

Classless Inter-Domain Routing (CIDR)

- Basically the method that ISPs (Internet Service Providers) use to allocate an amount of addresses to a company, a home
- Ex : 192.168.10.32/28
- The slash notation (/) means how many bits are turned on (1s)

CIDR Values

Subnet Mask	CIDR Value
255.0.0.0	/8
255.128.0.0	/9
255.192.0.0	/10
255.224.0.0	/11
255.240.0.0	/12

Determining Available Host Addresses

Network		Host	
172	16	0	0
10101100 00010000		$2^{16} - 2 = 65534$	
		00000000 00000000	1
		00000000 00000001	2
		00000000 00000011	3
		⋮	⋮
		11111111 11111101	65534
		11111111 11111110	65535
		11111111 11111111	65536
		-	2
		$2^N - 2 = 2^{16} - 2 = 65534$	65534

IP Address Classes Exercise

Address	Class	Network	Host
10.2.1.1			
128.63.2.100			
201.222.5.64			
192.6.141.2			
130.113.64.16			
256.241.201.10			

IP Address Classes Exercise Answers

Address	Class	Network	Host
10.2.1.1	A	10.0.0.0	0.2.1.1
128.63.2.100	B	128.63.0.0	0.0.2.100
201.222.5.64	C	201.222.5.0	0.0.0.64
192.6.141.2	C	192.6.141.0	0.0.0.2
130.113.64.16	B	130.113.0.0	0.0.64.16
256.241.201.10	Nonexistent		

Subnetting

- ☐ Subnetting is logically dividing the network by extending the 1's used in SNM
- ☐ Advantage
 - ☐ Can divide network in smaller parts
 - ☐ Restrict Broadcast traffic
 - ☐ Security
 - ☐ Simplified Administration

Formula


- ☐ Number of subnets – $2^x - 2$
Where X = number of bits borrowed
- ☐ Number of Hosts – $2^y - 2$
Where y = number of 0's
- ☐ Block Size = Total number of Address
Block Size = 256-Mask

Subnetting

- ❑ Classful IP Addressing SNM are a set of 255's and 0's.
- ❑ In Binary it's contiguous 1's and 0's.
- ❑ SNM cannot be any value as it won't follow the rule of contiguous 1's and 0's.
- ❑ Possible subnet mask values
 - 0
 - 128
 - 192
 - 224
 - 240
 - 248
 - 252
 - 254
 - 255


SNM = Subnet Network Mask

Addressing Without Subnets

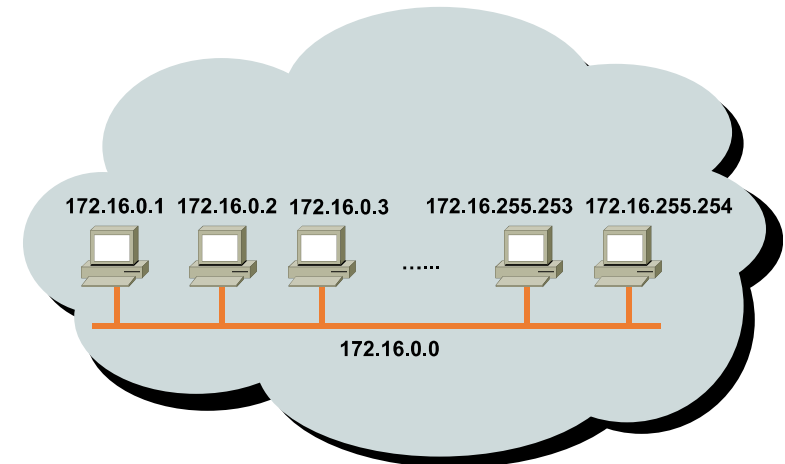


• Network 172.16.0.0

Addressing with Subnets

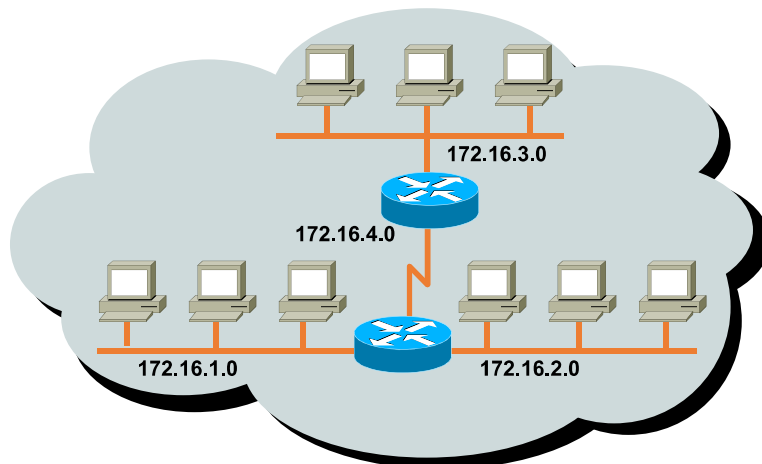


➤ Network 172.16.0.0

Subnet Addressing

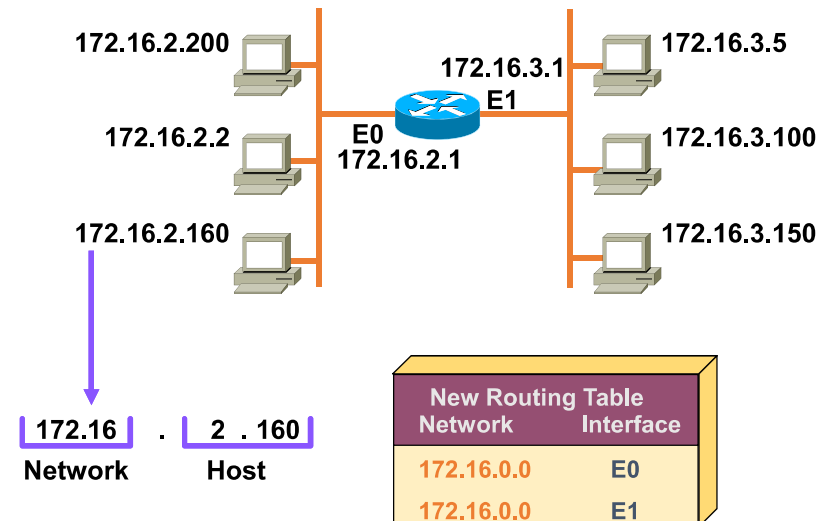

Subnet Addressing

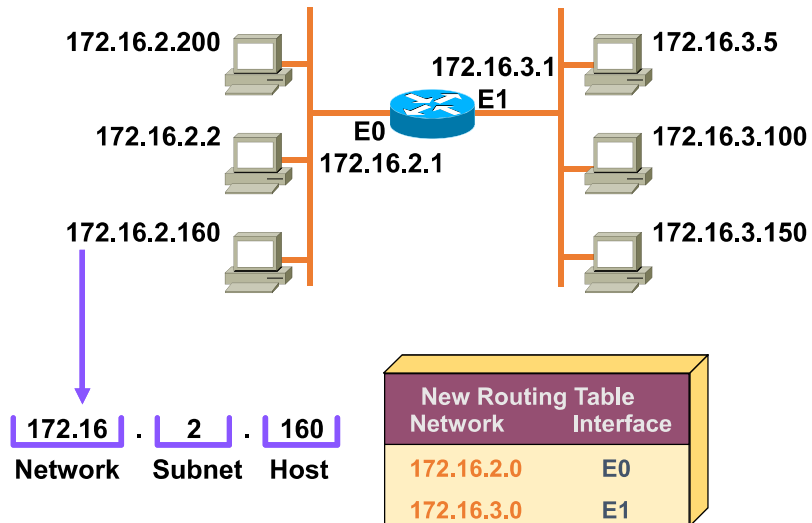

Subnet Mask

	Network		Host	
IP Address	172	16	0	0
	Network		Host	
Default Subnet Mask	255 11111111	255 11111111	0 00000000	0 00000000
	Network		Host	
8-Bit Subnet Mask	255	255	255	0
	Network		Subnet	Host
	Network		Subnet	Host
	Network		Subnet	Host

- Also written as "/16," where 16 represents the number of 1s in the mask
- Also written as "/24," where 24 represents the number of 1s in the mask

Decimal Equivalents of Bit Patterns

128	64	32	16	8	4	2	1	
0	0	0	0	0	0	0	0	= 0
1	0	0	0	0	0	0	0	= 128
1	1	0	0	0	0	0	0	= 192
1	1	1	0	0	0	0	0	= 224
1	1	1	1	0	0	0	0	= 240
1	1	1	1	1	0	0	0	= 248
1	1	1	1	1	1	0	0	= 252
1	1	1	1	1	1	1	0	= 254
1	1	1	1	1	1	1	1	= 255

Subnet Mask Without Subnets

	Network		Host	
172.16.2.160	10101100	00010000	00000010	10100000
255.255.0.0	11111111	11111111	00000000	00000000
	10101100	00010000	00000000	00000000
Network Number	172	16	0	0

• Subnets not in use—the default

Subnet Mask with Subnets

	Network		Subnet	Host
172.16.2.160	10101100	00010000	00000010	10100000
255.255.255.0	11111111	11111111	11111111	00000000
	10101100	00010000	00000010	00000000
			128 192 224 240 248 252 254 255	
Network Number	172	16	2	0

- Network number extended by eight bits

Subnet Mask with Subnets (cont.)

	Network		Subnet	Host
172.16.2.160	10101100	00010000	00000010	10100000
255.255.255.192	11111111	11111111	11111111	11000000
	10101100	00010000	00000010	10000000
			128 192 224 240 248 252 254 255	
Network Number	172	16	2	128

- Network number extended by ten bits


Subnet Mask Exercise

Address	Subnet Mask	Class	Subnet
172.16.2.10	255.255.255.0		
10.6.24.20	255.255.240.0		
10.30.36.12	255.255.255.0		

Subnet Mask Exercise Answers

Address	Subnet Mask	Class	Subnet
172.16.2.10	255.255.255.0	B	172.16.2.0
10.6.24.20	255.255.240.0	A	10.6.16.0
10.30.36.12	255.255.255.0	A	10.30.36.0

Broadcast Addresses

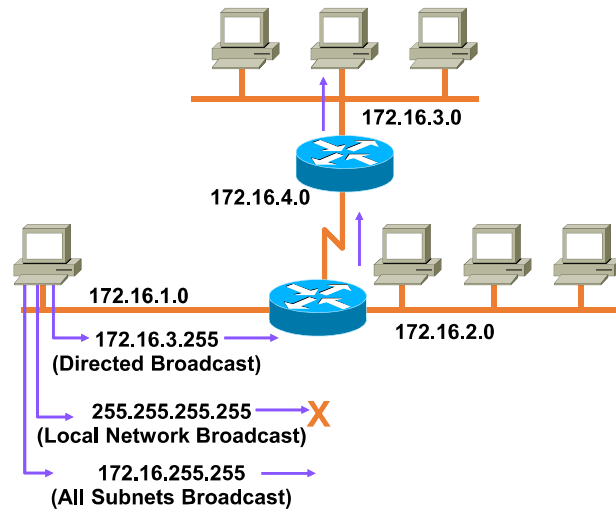

Addressing Summary Example

	172	16	2	160	
					3
172.16.2.160	10101100	00010000	00000010	10100000	Host 1
255.255.255.192	11111111	11111111	11111111	11000000	Mask 2
172.16.2.128	10101100	00010000	00000010	10000000	Subnet 4
172.16.2.191	10101100	00010000	00000010	10111111	Broadcast 5
172.16.2.129	10101100	00010000	00000010	10000001	First 6
172.16.2.190	10101100	00010000	00000010	10111110	Last 7

Class B Subnet Example


147

IP Host Address: 172.16.2.121
Subnet Mask: 255.255.255.0

	Network	Network	Subnet	Host
172.16.2.121:	10101100	00010000	00000010	01111001
255.255.255.0:	11111111	11111111	11111111	00000000
Subnet:	10101100	00010000	00000010	00000000
Broadcast:	10101100	00010000	00000010	11111111

- Subnet Address = 172.16.2.0
- Host Addresses = 172.16.2.1–172.16.2.254
- Broadcast Address = 172.16.2.255
- Eight Bits of Subnetting

Subnet Planning

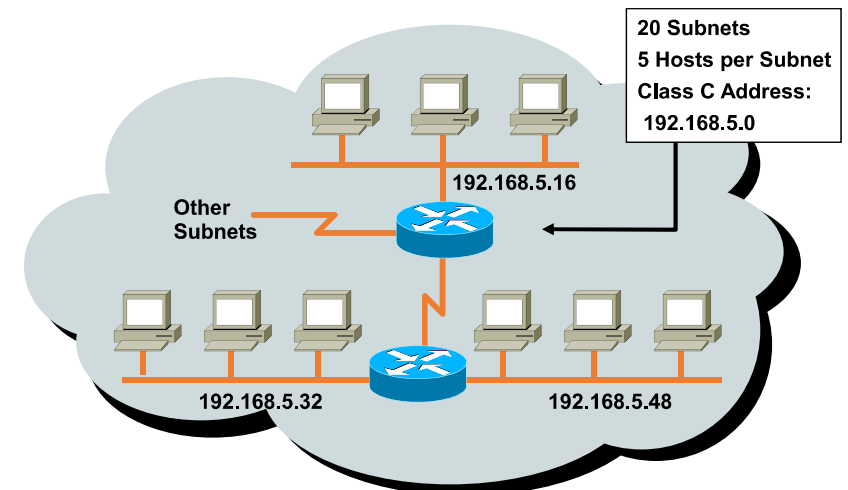

Class C Subnet Planning Example

149

IP Host Address: 192.168.5.121
Subnet Mask: 255.255.255.248

	Network	Network	Network	Subnet Host
192.168.5.121:	11000000	10101000	00000101	01111001
255.255.255.248:	11111111	11111111	11111111	11111000
Subnet:	11000000	10101000	00000101	01111000
Broadcast:	11000000	10101000	00000101	01111111

- Subnet Address = 192.168.5.120
- Host Addresses = 192.168.5.121–192.168.5.126
- Broadcast Address = 192.168.5.127
- Five Bits of Subnetting

Exercise

- 192.168.10.0
- /27

? – SNM
? – Block Size
?- Subnets

Exercise

151

- /27

? – SNM – 224

? – Block Size = 256-224 = 32

?- Subnets

Subnets	10.0	10.32	10.64
FHID	10.1	10.33	
LHID	10.30	10.62	
Broadcast	10.31	10.63	

Exercise

- 192.168.10.0
- /30

? – SNM
? – Block Size
?- Subnets

Exercise

• /30

? – SNM – 252

? – Block Size = $256 - 252 = 4$

?- Subnets

Subnets	10.0	10.4	10.8
FHID	10.1	10.5	
LHID	10.2	10.6	
Broadcast	10.3	10.7	

Exercise

	Mask	Subnets	Host
/26	?	?	?
/27	?	?	?
/28	?	?	?
/29	?	?	?
/30	?	?	?

Exercise

	Mask	Subnets	Host
/26	192	4	62
/27	224	8	30
/28	240	16	14
/29	248	32	6
/30	252	64	2

Question

- Find Subnet and Broadcast address
 - 192.168.0.100/27



Exercise

☐ 192.168.10.54 /29

☐ Mask ?

☐ Subnet ?

☐ Broadcast ?



Exercise

☐ 192.168.10.130 /28

☐ Mask ?

☐ Subnet ?

☐ Broadcast ?



Exercise

☐ 192.168.10.193 /30

☐ Mask ?

☐ Subnet ?

☐ Broadcast ?



Exercise

☐ 192.168.1.100 /26

☐ Mask ?

☐ Subnet ?

☐ Broadcast ?



Exercise

□ 192.168.20.158 /27

□ Mask ?

□ Subnet ?

□ Broadcast ?

Class B

172.16.0.0 /19

Subnets ?

Hosts ?

Block Size ?

Class B

172.16.0.0 /19

Subnets $2^3 - 2 = 6$

Hosts $2^{13} - 2 = 8190$

Block Size $256 - 224 = 32$

Subnets	0.0	32.0	64.0	96.0
FHID	0.1	32.1	64.1	96.1
LHID	31.254	63.254	95.254	127.254
Broadcast	31.255	63.255	95.255	127.255

Class B

172.16.0.0 /27

Subnets ?

Hosts ?

Block Size ?

Class B

172.16.0.0 /27

Subnets $2^{11} - 2 = 2046$

Hosts $2^5 - 2 = 30$

Block Size $256 - 224 = 32$

Subnets	0.0	0.32	0.64	0.96
FHID	0.1	0.33	0.65	0.97
LHID	0.30	0.62	0.94	0.126
Broadcast	0.31	0.63	0.95	0.127

Class B

172.16.0.0 /23

Subnets ?

Hosts ?

Block Size ?

Class B

172.16.0.0 /23

Subnets $2^7 - 2 = 126$

Hosts $2^9 - 2 = 510$

Block Size $256 - 254 = 2$

Subnets	0.0	2.0	4.0	6.0
FHID	0.1	2.1	4.1	6.1
LHID	1.254	3.254	5.254	7.254
Broadcast	1.255	3.255	5.255	7.255

Class B

172.16.0.0 /24

Subnets ?

Hosts ?

Block Size ?

Class B

172.16.0.0 /24

Subnets $2^8 - 2 = 254$

Hosts $2^8 - 2 = 254$

Block Size $256 - 255 = 1$

Subnets	0.0	1.0	2.0	3.0
FHID	0.1	1.1	2.1	3.1
LHID	0.254	1.254	2.254	3.254
Broadcast	0.255	1.255	2.255	3.255

Class B

172.16.0.0 /25

Subnets ?

Hosts ?

Block Size ?

Class B

172.16.0.0 /25

Subnets $2^9 - 2 = 510$

Hosts $2^7 - 2 = 126$

Block Size $256 - 128 = 128$

Subnets	0.0	0.128	1.0	1.128	2.0	2.128
FHID	0.1	0.129	1.1	1.129	2.1	2.129
LHID	0.126	0.254	1.126	1.254	2.126	2.254
Broadcast	0.127	0.255	1.127	1.255	2.127	2.255

Find out Subnet and Broadcast Address

- 172.16.85.30/20



Find out Subnet and Broadcast Address

- 172.16.85.30/29



Find out Subnet and Broadcast Address

- 172.30.101.62/23



Find out Subnet and Broadcast Address

- 172.20.210.80/24



Exercise

- Find out the mask which gives 100 subnets for class B

Exercise

- Find out the Mask which gives 100 hosts for Class B

Class A

10.0.0.0 /10
Subnets ?
Hosts ?
Block Size ?

Class A

10.0.0.0 /10
Subnets $2^2 - 2 = 2$
Hosts $2^{22} - 2 = 4194302$
Block Size $256 - 192 = 64$

Subnets	10.0	10.64	10.128	10.192
FHID	10.0.0.1	10.64.0.1	10.128.0.1	10.192.0.1
LHID	10.63.255.254	10.127.255.254	10.191.255.254	10.254.255.254
Broadcast	10.63.255.255	10.127.255.255	10.191.255.255	10.254.255.255

Class A

10.0.0.0 /18
Subnets ?
Hosts ?
Block Size ?

Class A

10.0.0.0 /18

Subnets $2^{10} - 2 = 1022$

Hosts $2^{14} - 2 = 16382$

Block Size $256 - 192 = 64$

Subnets	10.0.0.0	10.0.64.0	10.0.128.0	10.0.192.0
FHID	10.0.0.1	10.0.64.1	10.0.128.1	10.0.192.1
LHID	10.0.63.254	10.0.127.254	10.0.191.254	10.0.254.254
Broadcast	10.0.63.255	10.0.127.255	10.0.191.255	10.0.254.255

Broadcast Addresses Exercise

Address	Subnet Mask	Class	Subnet	Broadcast
201.222.10.60	255.255.255.248			
15.16.193.6	255.255.248.0			
128.16.32.13	255.255.255.252			
153.50.6.27	255.255.255.128			

Broadcast Addresses Exercise Answers

Address	Subnet Mask	Class	Subnet	Broadcast
201.222.10.60	255.255.255.248	C	201.222.10.56	201.222.10.63
15.16.193.6	255.255.248.0	A	15.16.192.0	15.16.199.255
128.16.32.13	255.255.255.252	B	128.16.32.12	128.16.32.15
153.50.6.27	255.255.255.128	B	153.50.6.0	153.50.6.127

VLSM


- VLSM is a method of designating a different subnet mask for the same network number on different subnets
- Can use a long mask on networks with few hosts and a shorter mask on subnets with many hosts
- With VLSMs we can have different subnet masks for different subnets.

Variable Length Subnetting

➤VLSM allows us to use one class C address to design a networking scheme to meet the following requirements:


- Paris 60 Hosts
- London 28 Hosts
- Sydney 12 Hosts
- Singapore 12 Hosts
- WAN 1 2 Hosts
- WAN 2 2 Hosts
- WAN 3 2 Hosts

Networking Requirements

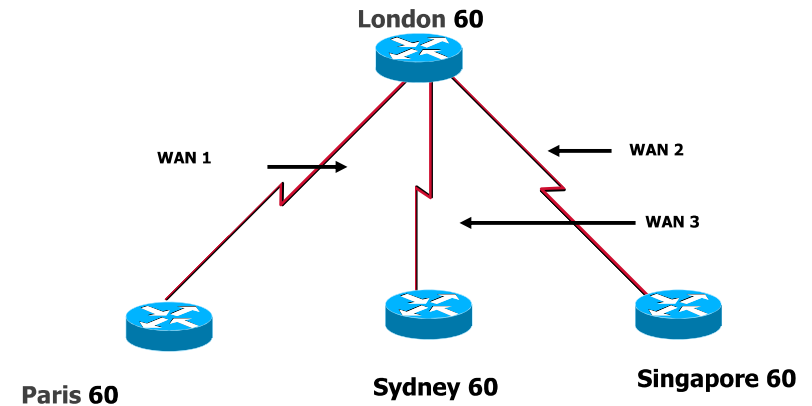


❑In the example above, a /26 was used to provide the 60 addresses for Paris and the other LANs. There are no addresses left for WAN links


Networking Scheme

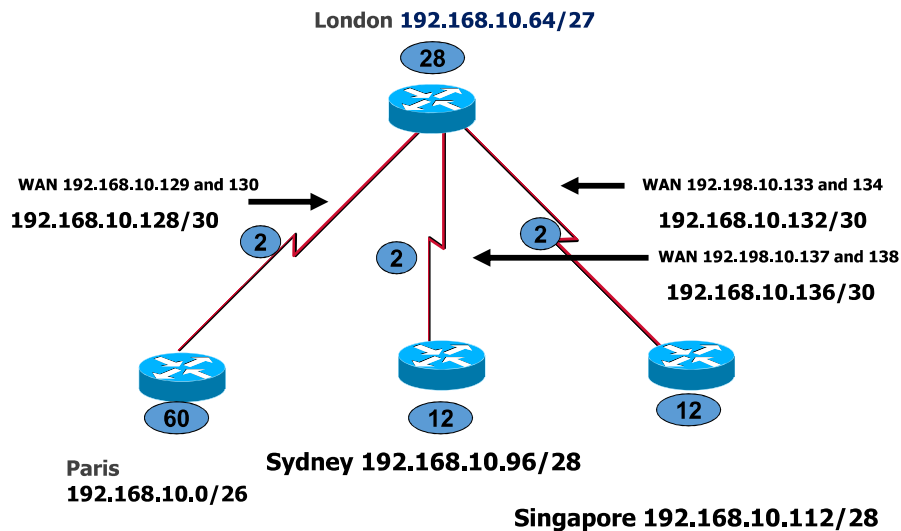


VLSM Exercise

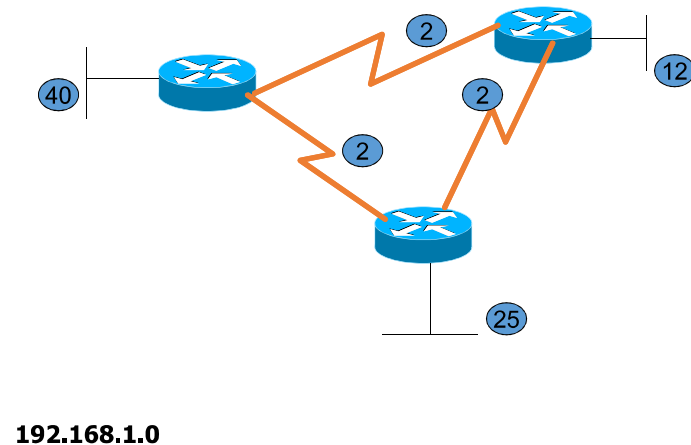

VLSM Exercise

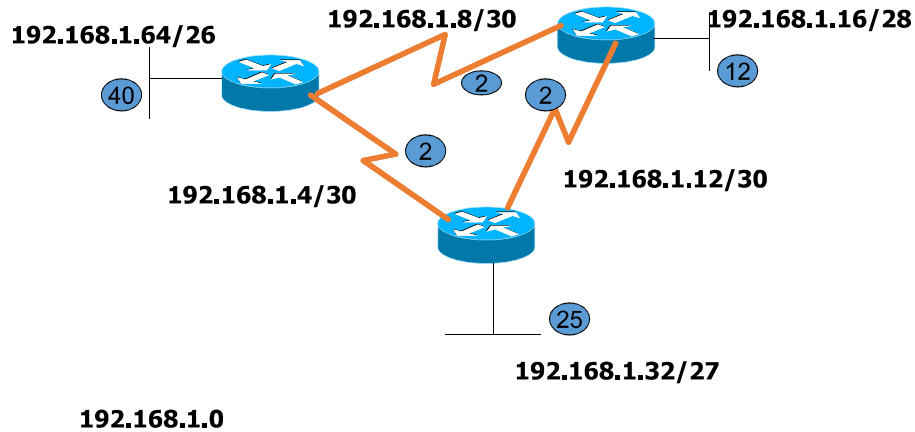


VLSM Exercise

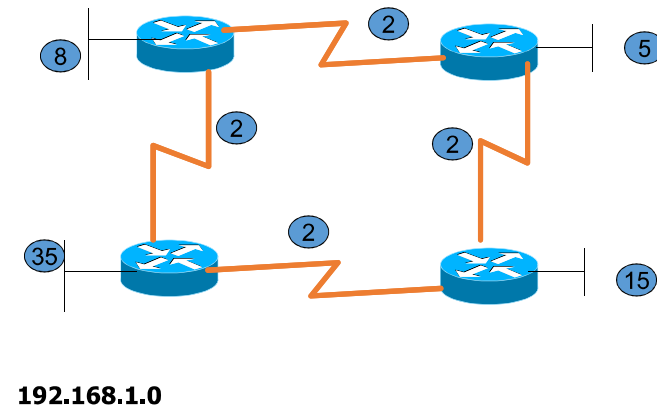

Summarization

- Summarization, also called route aggregation, allows routing protocols to advertise many networks as one address.
- The purpose of this is to reduce the size of routing tables on routers to save memory
- Route summarization (also called route aggregation or supernetting) can reduce the number of routes that a router must maintain
- Route summarization is possible only when a proper addressing plan is in place
- Route summarization is most effective within a subnetted environment when the network addresses are in contiguous blocks

Summarization

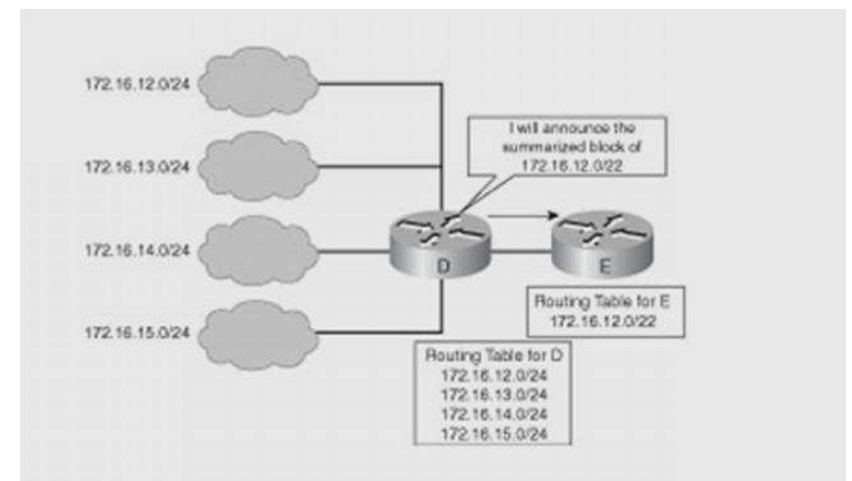

Supernetting

	Network	Network	Network	Subnet
			16 8 4 2 1	
172.16.12.0	11000000	10101000	00001100	00000000
172.16.13.0	11000000	10101000	00001101	00000000
172.16.14.0	11000000	10101000	00001110	00000000
172.16.15.0	11000000	10101000	00001111	00000000
255.255.255.0	11111111	11111111	11111111	00000000


Supernetting

	Network	Network	Network	Subnet
			16 8 4 2 1	
172.16.12.0	11000000	10101000	00001100	00000000
172.16.13.0	11000000	10101000	00001101	00000000
172.16.14.0	11000000	10101000	00001110	00000000
172.16.15.0	11000000	10101000	00001111	00000000
255.255.252.0	11111111	11111111	11111100	00000000

172.16.12.0/24
 172.16.13.0/24
 172.16.14.0/24
 172.16.15.0/24

} 172.16.12.0/22

Supernetting Question

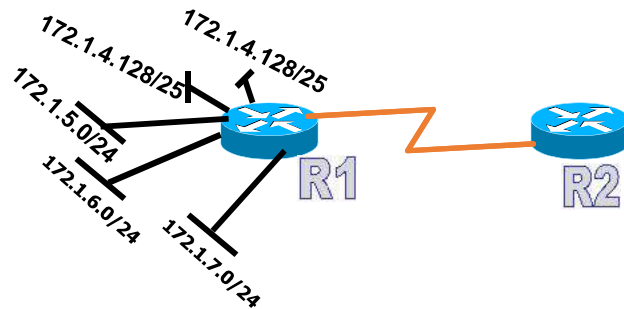

What is the most efficient summarization that R1 can use to advertise its networks to R2?

- A. 172.1.4.0/24 172.1.5.0/24 172.1.6.0/24 172.1.7.0/24
- B. 172.1.0.0/22
- C. 172.1.4.0/25 172.1.4.128/25 172.1.5.0/24 172.1.6.0/24 172.1.7.0/24
- D. 172.1.0.0/21
- E. 172.1.4.0/22